## RATHDOWNE

# STAGE 6A STREETSCAPES

PROJECT NUMBER: 307523 LANDSCAPE ARCHITECTURE DRAWINGS FOR VILLAWOOD

#### DRAWING SCHEDULE

DRAWING NO.	DESCRIPTION	SHEET NO.	REVISION
LD100	COVER - SHEET 1	1	А
LD700	PLANTING PLANS - SHEET 1	2	А
LD900	DETAILS - SHEET 1	3	А

PLANNING AND ENVIRONMENT ACT CITY OF WHITTLESEA PLANNING SCHEME Plan referred to in Permit to use and/or develop land. Application No. 716630 Condition No: 18.2 Sheet 1 of 3


#### **PLANTING SCHEDULE - TREES**

CODE	BOTANICAL NAME	COMMON NAME	INSTALL SIZE (LITRES)	MATURE SIZE (h x w)	QTY
El	Eucalyptus leucoxylon 'megalocarpa	LARGE FRUITED YELLOW GUM	45L POT	8 X 6	3
Hf	Hymenosporum flavum	NATIVE FRANGIPANI	45L POT	15 X 7	19
Total					22

ALL TREE STOCK TO CONFORM TO AS 2303:2018; APPENDIX D. ALL TREE STOCK OF 45L TO HAVE A HEIGHT OF 1.5m - 2.0m AND CALIPER OF 25mm - 30mm UNLESS APPROVED IN WRITING BY THE SUPERINTENDENT



SITE LOCATION

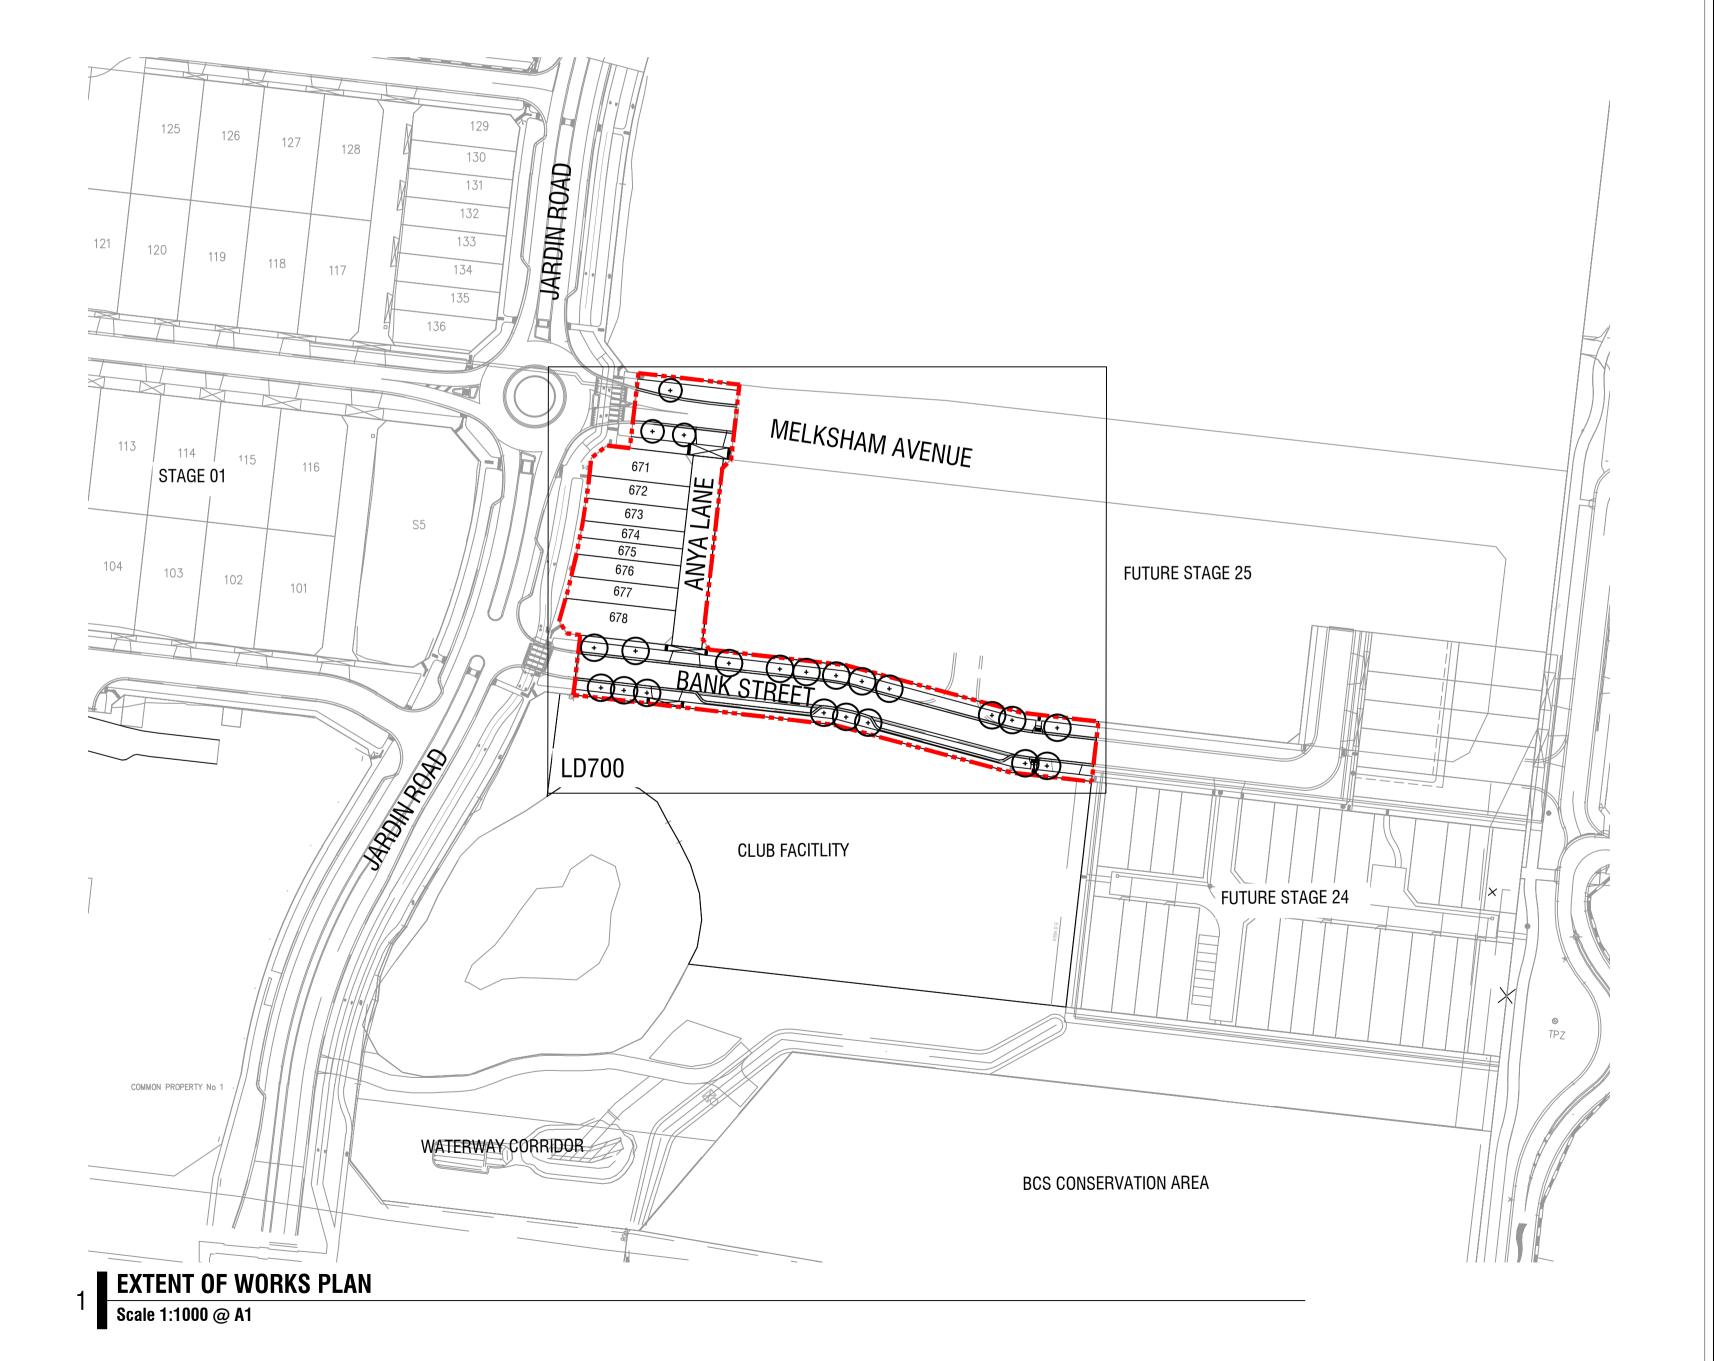

#### **GENERAL NOTES**

- Unless otherwise specified on the drawings all measurements, lengths, heights and distances to be determined from dimensions and NOT scaled off the drawings.
- Before commencement of any works it is the responsibility of the Landscape Contractor to contact Dial Before You Dig 1100 (Fax 1300 652 077) for information on services in the area shown on the plan (www.dialbeforeyoudig.com.au)
- The locations of underground services are approximate only and their exact position should be proven on site. No guarantee is given that all existing services are shown. The Contractor shall verify the location and depth of all services prior to commencing on site.
- 4. The Contractor must have a copy of Melbourne One Call/Services information and plans on site at all times.
- 5. The Contractor shall be liable for any damage to services during
- 6. All trees shall be planted in locations shown on this plan, with setout to be approved on site by the Superintendent prior to planting.
- 7. Tree canopies are shown at 75% of mature diameter.
- 8. Any change in plant species must have the approval of the
- 9. Trees shall not be planted less than the following distances from existing elements, unless otherwise stated in the documentation:
  - Pedestrian pathways 1.2m - Pedestrian pathways in reserve - 2.0m
- Driveways and crossovers 3.0m - Stormwater and sewerage pits - 2.0m
- Intersections 10.0m
- Service crossings 2.0m
- Back of Kerb 1.0m min.
- Street lights and power poles 4.0m - Service assets, incl. junction boxes, pits etc - 2.0m
- 10. The Superintendent is to inspect trees supplied by the Contractor prior to
- 11. The Principal will ensure that all property boundaries are to be pegged
- 12. All drawings 'For Construction' to be printed in colour

out by licensed surveyors prior to set out of landscape works.

© Spiire Australia Pty Ltd All Rights Reserved

This document is produced by Spiire Australia Pty Ltd solely for the benefit of and use by the client in accordance with the terms of the retainer. Spiire Australia Pty Ltd does not and shall not assume any responsibility or liability whatsoever to any third party arising out of any use or reliance by third party on the content of this document.

### 414 LA TROBE STREET PO BOX 16084 MELBOURNE

**VICTORIA 8007 AUSTRALIA T 61 3 9993 7888** www.spiire.com.au

	PRELIMINARY			
	ISSUED TO COUNCIL	MS	05/10/20	
REV	DESCRIPTION	APP	DATE	

#### **RATHDOWNE**

#### **STAGE 6A STREETSCAPES**


#### **DETAILED DESIGN**

**COVER - SHEET 1** 

SHEET 1 OF 3

**CITY OF WHITTLESEA VILLAWOOD** 





16/09/2020 307523LD100 A



Tree watering (1): immediately after planting, tree shall be watered thoroughly regardless of weather conditions, quantity of water will be adequate to saturate the root ball to its core

Tree watering (2): post planting, provide a minimum of 15 litres of water (for tree in 45 litre pot) to the newly planted tree per 7 days. Water at a slow rate so as not to displace mulch. For trees in pot size larger than 45 litres, provide quantity of water one third of that pot size.

All trees to be healthy specimens free of pests and diseases. Trees to be well watered a maximum of 24hours prior to planting.

- 3 no. 50x50x2400mm hardwood stakes set vertically and clear of rootball and minimum 800mm into ground. Paint all exposed surfaces of stakes with matte black paint. Stakes are to be offset from the nearest underground service a minimum of 200mm to ensure no damage is caused to underground service

- 3 no. 50mm wide hessian ties loosely wrapped around trunk at 1/3 tree height and shade cloth fasterners to stakes allowing some trunk movement; refer to plan detail above.

 Create dish to keep mulch clear of tree trunk. Top of root ball flush with finished level of planting hole.

- 75mm high berm to form a watering basin

 200mm depth of approved aged wood mulch. Mulch shall be spread a minimum of 1200mm diameter from centre of tree and beyond of the planting hole overlapping undisturbed soil

Excavate a shallow planting hole with sloping sides 3 times the width of the root ball and break-up sides and base, refirm base. Depth of planting hole no deeper than the height of the root ball. Backfill with 50/50 blend imported topsoil/site topsoil broken up to friable texture, firming progressively.

Slow release fertiliser (for exotic species only)


Water retaining products to be mixed into backfilled soil as per manufacturers specifications.
 Existing subgrade

- Compact soil under rootball to prevent settling

NOTE: it is the responsibility of the contractor to confirm the location of all underground services prior to commencement of any excavation works, tree planting, specifications, street tree offsets / clearance, hold points, species substitution, tree staking and tree maintenance to be undertaken in accordance with City of Whittlesea minimum landscape maintenance specification of services and works May 2010.

#### SEMI-ADVANCED TREE PLANTING DETAIL

Scale 1:20 @ A1

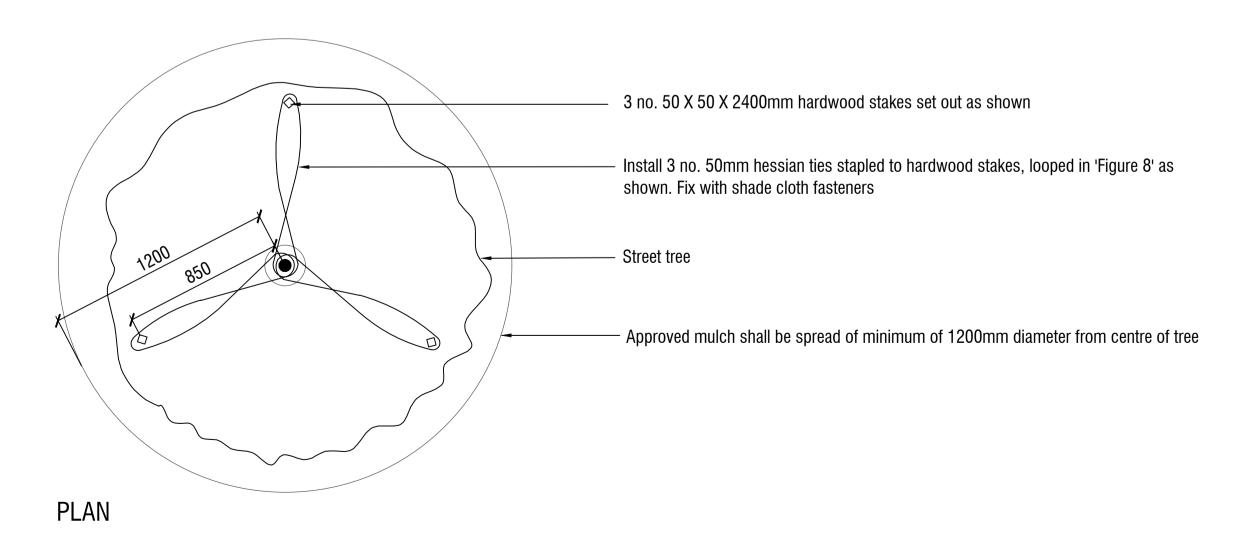

TREE TIE DETAIL

Scale 1:20 @ A1

SEED MIX : 70% Kikuyu 15% Tall Fescue

15% Perennial Rye

#### OTES

- 1. Existing pasture grass and/or weeds are to be sprayed with herbicide.
- 2. No machinery to be used within the drip line of existing trees.
- 3. Topsoil to be raked to a fine tilth, removal of all surface rocks, large lumps of clay, weeds and rubbish prior to application of seed to all areas as shown.

PLANNING AND ENVIRONMENT ACT

CITY OF WHITTLESEA PLANNING SCHEME

and/or develop land.


Application No. 716630 Condition No: 18.2

Plan referred to in Permit to use

Sheet 3 of 3
Date Permit Issued 04/08/2017

Date: 9/10/

4. New grassed areas to be protected from trespass and traffic with star pickets and barrier rope until grass is established.

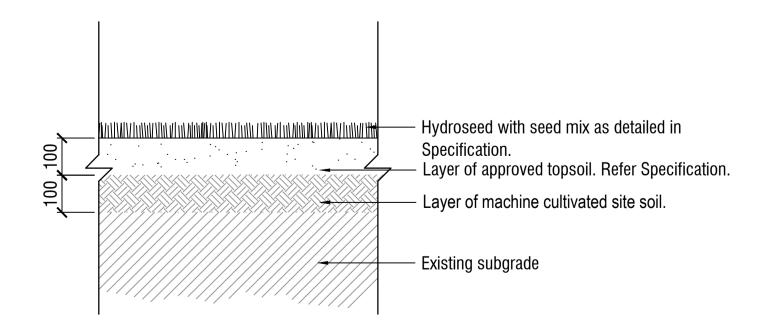

HYDROMULCH GRASS DETAIL

Scale 1:10 @ A1

### spiire

the content of this document.

© Spiire Australia Pty Ltd All Rights Reserved
This document is produced by Spiire Australia Pty Ltd solely for the benefit of
and use by the client in accordance with the terms of the retainer. Spiire
Australia Pty Ltd does not and shall not assume any responsibility or liability
whatsoever to any third party arising out of any use or reliance by third party on

414 LA TROBE STREET PO BOX 16084 MELBOURNE VICTORIA 8007 AUSTRALIA T 61 3 9993 7888

www.spiire.com.au ABN 55 050 029 63

_A	ISSUED TO COUNCIL	MS	05/10/20
REV	DESCRIPTION	APP	DATE

#### **RATHDOWNE**

#### **STAGE 6A STREETSCAPES**

#### **DETAILED DESIGN**

DETAILS - SHEET 1
SHEET 3 OF 3
CITY OF WHITTLESEA
VILLAWOOD

16/09/2020

AS SHOWN

307523LD900 A

DESIGNED DRAWN CHECKED APPROVED SV MS