


REFER TOP RIGHT FOR CONTINUATION

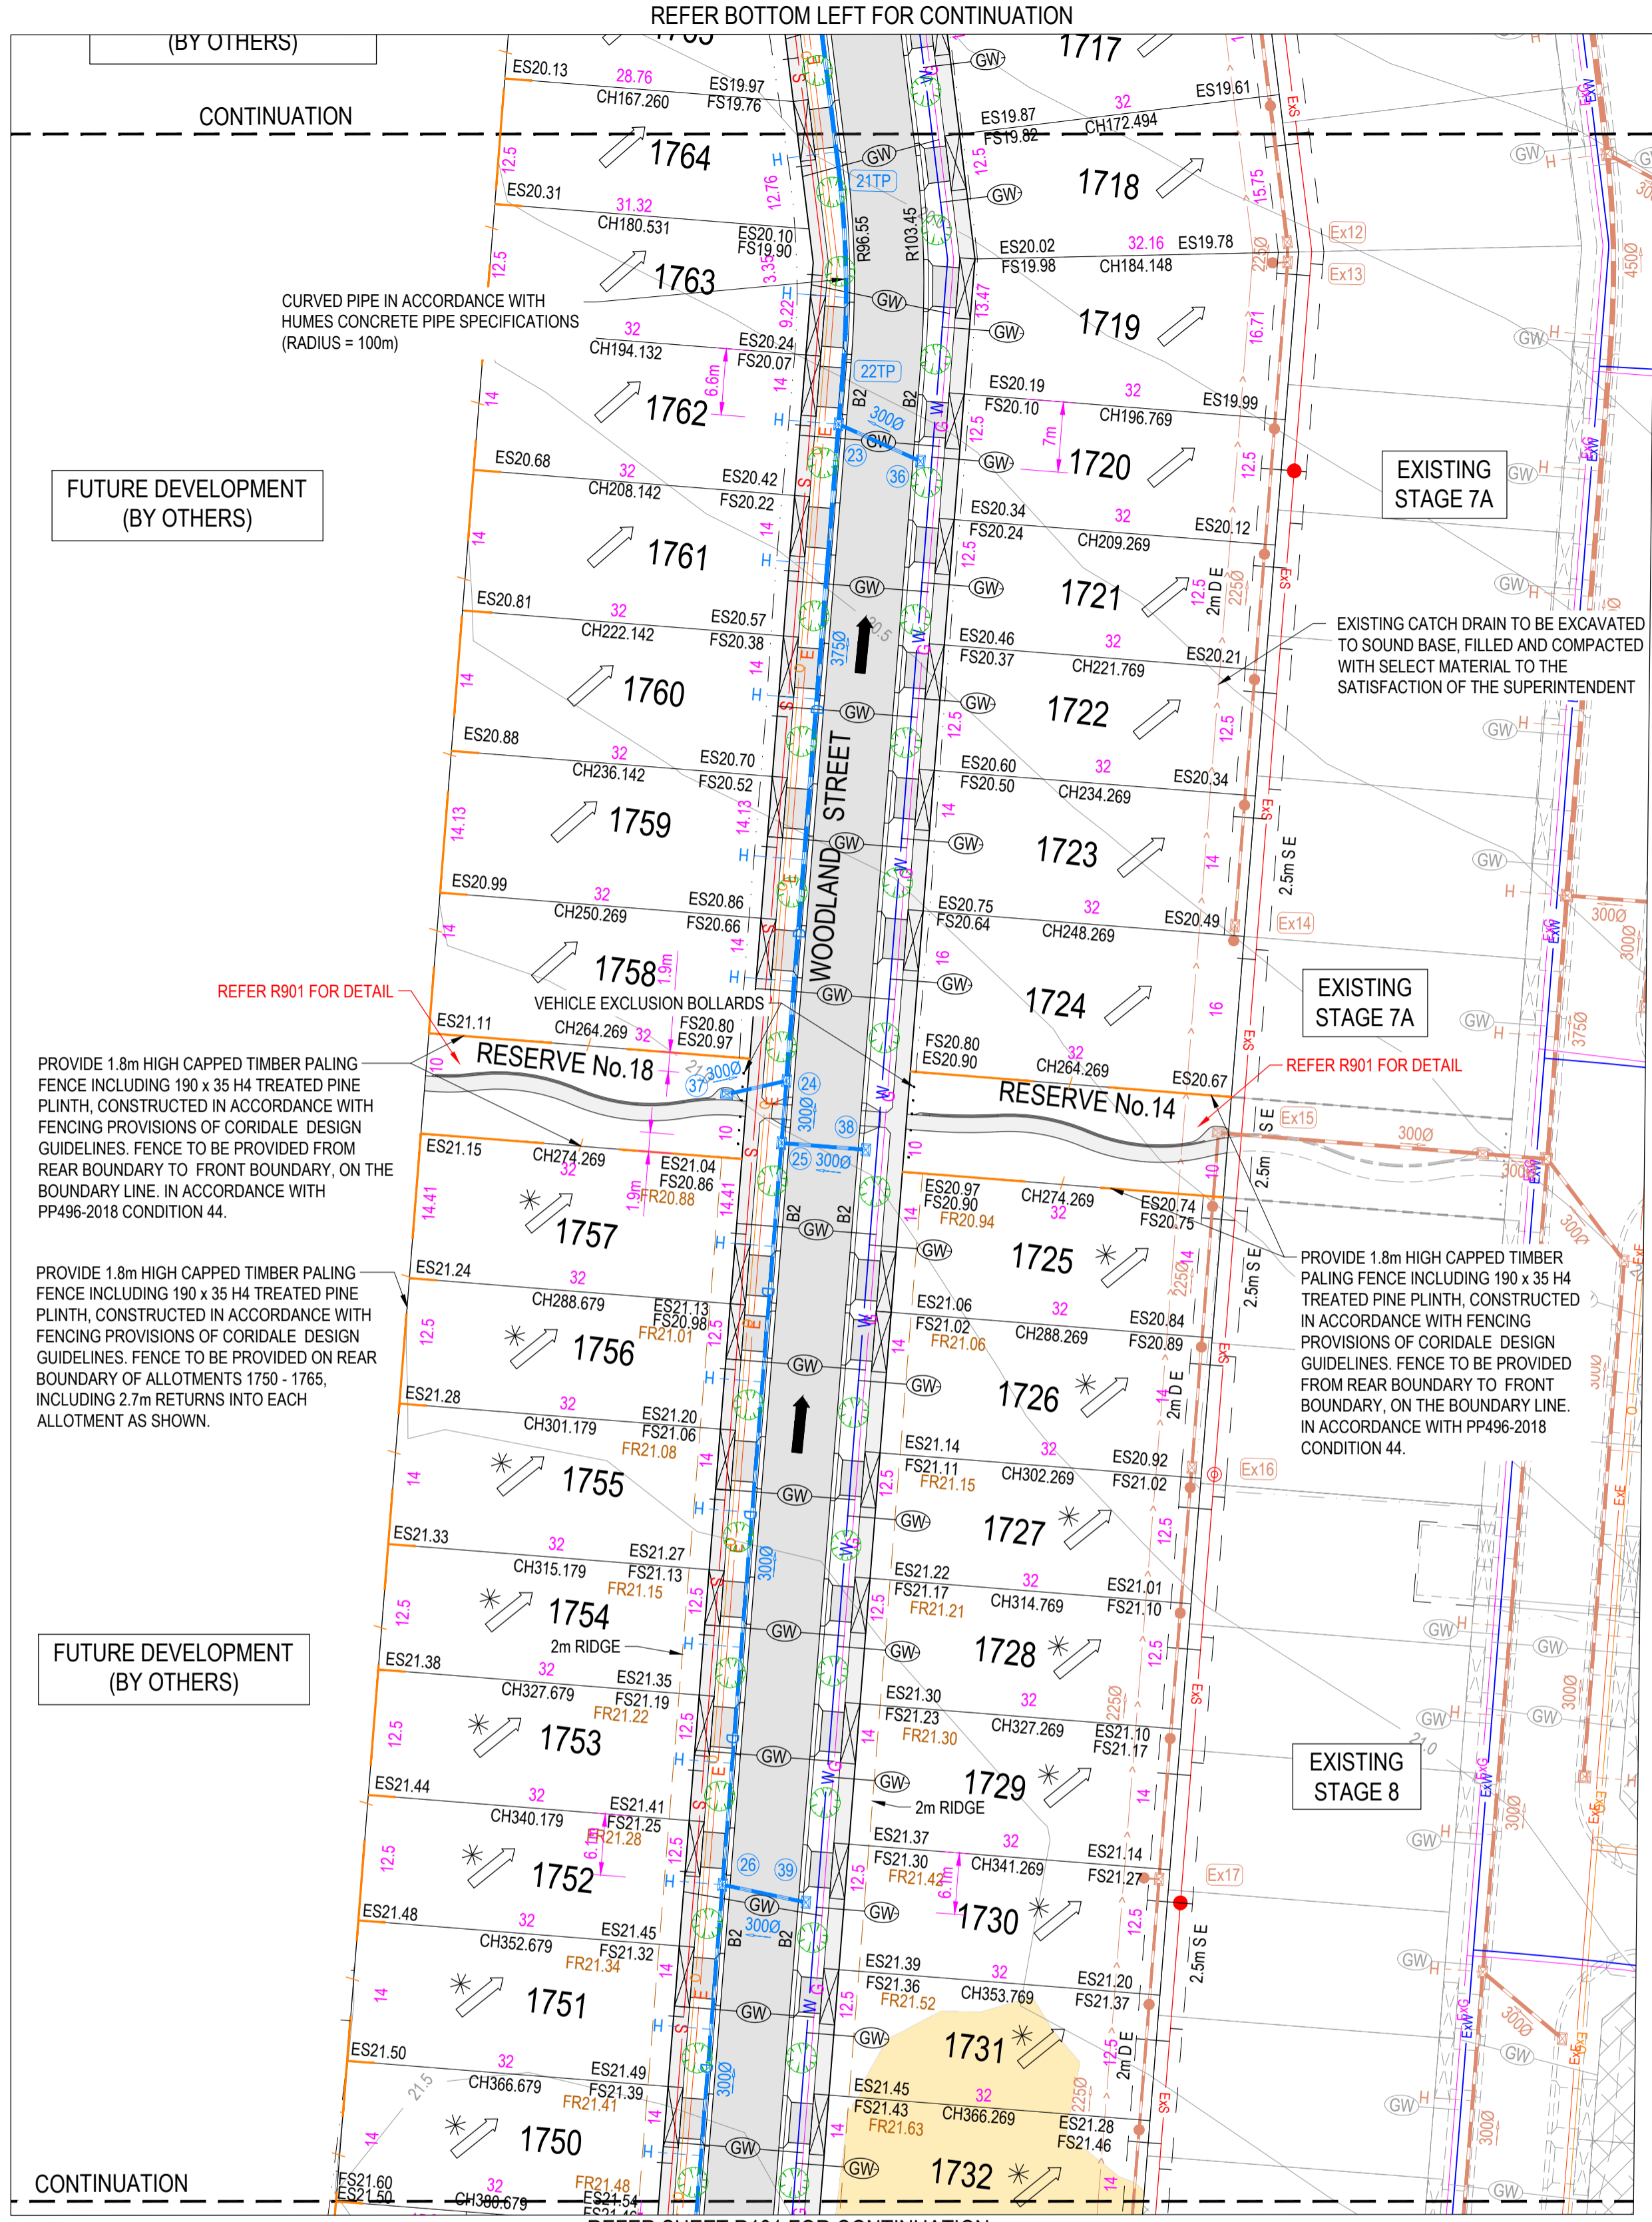

ROAD NAME	SERVICES OFFSET SCHEDULE							
	GAS		WATER		OPTIC FIBRE		ELECTRICITY	
	SIDE	OFFSET (m)	SIDE	OFFSET (m)	SIDE	OFFSET (m)	SIDE	OFFSET (m)
HOMESTEAD DRIVE	NORTH	3.10	NORTH	3.60	SOUTH	1.80	SOUTH	2.40
VERDANT STREET	NORTH	2.10	NORTH	2.70	NORTH	3.50	NORTH	4.25
WOODLAND STREET	NORTH/EAST	2.10	NORTH/EAST	2.70	SOUTH/WEST	1.85	SOUTH/WEST	2.40
SPIRIT STREET	EAST	2.10	EAST	2.70	WEST	1.85	WEST	2.40
TRIM PLACE	EAST	2.10	EAST	2.70	WEST	1.00	WEST	1.60
HAVILAH CIRCUIT (FUTURE)	WEST	2.10	WEST	2.70	WEST	3.50	WEST	4.05
RESERVE No.13	-	-	EAST	2.70	-	-	-	-

1. * DENOTES OFFSET FROM BACK OF KERB.

CITY OF GREATER GEELONG TO STAMP HERE UPON APPROVAL


LEGEND - LAYOUT PLAN

- STORMWATER DRAIN, PIT & PROPERTY INLET
- SWALE DRAIN
- SEWER & MAINTENANCE STRUCTURES
- HOUSE DRAIN
- SERVICE CONDUITS
- EXISTING ELECTRICITY (UNDERGROUND)
- EXISTING ELECTRICITY (OVERHEAD)
- EXISTING GAS
- EXISTING OPTIC FIBRE
- EXISTING TELSTRA
- EXISTING RECYCLED WATER
- EXISTING STORMWATER DRAIN
- EXISTING SEWER
- EXISTING SURFACE LEVEL
- FINISHED BUILDING LINE LEVEL
- FINISHED RIDGE LINE LEVEL
- PAVEMENT TREATMENT
- STRUCTURAL FILL > 200mm DEEP
- EX. STRUCTURAL FILL > 200mm DEEP
- DIRECTION OF FALL
- OVERLAND FLOW
- ALLOTMENT TO BE GRADED EVENLY IN
- DIRECTION OF FALL TO LEVELS INDICATED
- CONCRETE EDGE STRIP WITH SUBSOIL DRAIN
- 'NO ROAD' SIGN & BARRIER
- LIMIT OF WORKS
- EXISTING TREE TO BE REMOVED
- PERMANENT SURVEY MARK
- TEMPORARY BENCH MARK
- PROPOSED DRIVEWAY
- 1.8m HIGH CAPPED TIMBER PALING FENCE INCLUDING 190 x 35 H4 TREATED PINE PLINTH
- STORM WATER PIT SETOUT POINT

- NOTES:**
- ALL VEHICLE AND PRAM CROSSING LAYBACKS, TO BE MINIMUM OF 1.0m FROM PITS.
 - ALL PRAM CROSSINGS TO BE A MINIMUM 2.0m FROM VEHICLE CROSSINGS.
 - ALL PRAM CROSSINGS TO BE DDA COMPLIANT.
 - VEHICLE EXCLUSION MEASURES BETWEEN ROAD RESERVE AND RESERVE TO FORM PART OF LANDSCAPE WORKS.
 - THE USE OF DIRECTIONAL AND HAZARD TACTILE PAVERS MUST ACCORD WITH SECTION 2.2.3.1 OF AS/NZS 1428.4:2002.
 - SEWER MAINTENANCE HOLE CONVERTER SLAB OR CONE, TO BE ROTATED TO ENSURE COVER POSITION IS CENTRALLY LOCATED WITHIN FOOTPATH.
 - CHAINAGES FOR SETOUT OF PROPERTY INLET POINTS, SERVICING FUTURE LOTS, ARE MEASURED FROM THE DOWNSTREAM PIT.
 - CONTRACTOR TO LOCATE ALL EXISTING ASSETS PRIOR TO COMMENCEMENT OF WORKS. ANY DAMAGE TO EXISTING ASSETS TO BE RECTIFIED AT CONTRACTORS EXPENSE.
 - CONTRACTOR TO VERIFY DEPTH OF EXISTING SERVICES, PRIOR TO COMMENCEMENT OF CONSTRUCTION.

NOTE: STREET TREE LOCATIONS SHOWN ARE INDICATIVE ONLY. ULTIMATE LOCATION IS TO BE PROVIDED/CONFIRMED BY LANDSCAPE ARCHITECTS

WARNING
BWARE OF UNDERGROUND & OVERHEAD SERVICES
The locations of underground & overhead services are approximate only & their exact position should be proven on site. No guarantee is given that all existing services are shown. Locate all underground services before commencement of works
DIAL 1100 BEFORE YOU DIG
www.1100.com.au



REVISION	DATE	ISSUE DESCRIPTION	DRAWN	DESIGNED	APPROVED	CLIENT
A	18/10/21	ISSUED FOR APPROVAL	C.ROHDE	C.ROHDE	M.TROUNCE	





Suite 1, 2 Bloombsury Street
Geelong, VIC, Australia 3220




CORIDALE ESTATE - STAGE 17A
LAYOUT PLAN - 1

ISSUED FOR APPROVAL
NOT FOR CONSTRUCTION







SCALE AT A1	DRAWN	DESIGNED
1:500 @ A1	C.ROHDE	C.ROHDE
PROJECT ENGINEER	PROJECT MANAGER	DATE FIRST ISSUE
M.TROUNCE	M.TROUNCE	OCTOBER 2021
PROJECT No.	DRAWING No.	REVISION
180014.17A	R200	A

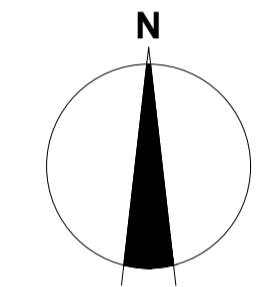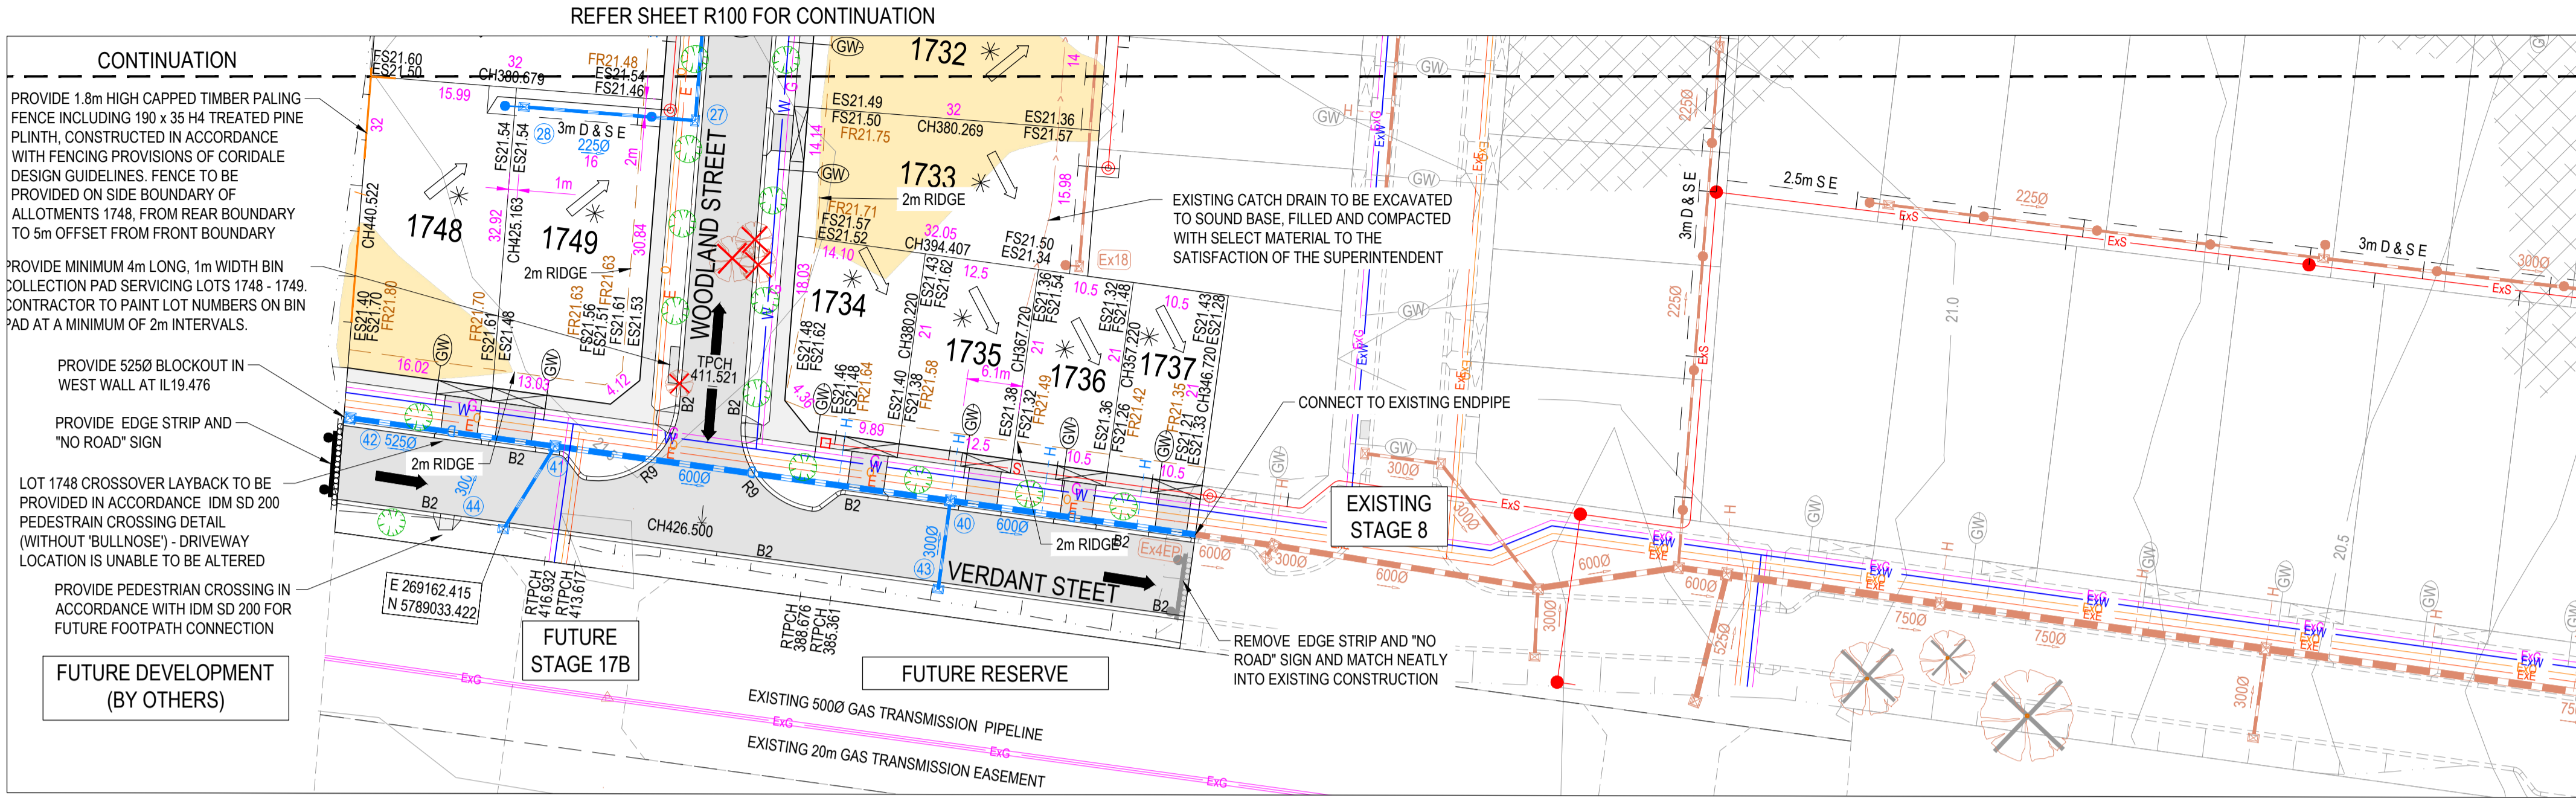

- NOTES:
1. ALL VEHICLE AND PRAM CROSSING LAYBACKS, TO BE MINIMUM OF 1.0m FROM PITS.
 2. ALL PRAM CROSSINGS TO BE A MINIMUM 2.0m FROM VEHICLE CROSSINGS.
 3. ALL PRAM CROSSINGS TO BE DDA COMPLIANT.
 4. VEHICLE EXCLUSION MEASURES BETWEEN ROAD RESERVE AND RESERVE TO FORM PART OF LANDSCAPE WORKS.
 5. THE USE OF DIRECTIONAL AND HAZARD TACTILE PAVERS MUST ACCORD WITH SECTION 2.2.3.1 OF AS/NZS 1428.4:2002.
 6. SEWER MAINTENANCE HOLE CONVERTER SLAB OR CONE, TO BE ROTATED TO ENSURE COVER POSITION IS CENTRALLY LOCATED WITHIN FOOTPATH.
 7. CHAINAGES FOR SETOUT OF PROPERTY INLET POINTS, SERVICING FUTURE LOTS, ARE MEASURED FROM THE DOWNSTREAM PIT.
 8. CONTRACTOR TO LOCATE ALL EXISTING ASSETS PRIOR TO COMMENCEMENT OF WORKS. ANY DAMAGE TO EXISTING ASSETS TO BE RECTIFIED AT CONTRACTORS EXPENSE.
 9. CONTRACTOR TO VERIFY DEPTH OF EXISTING SERVICES, PRIOR TO COMMENCEMENT OF CONSTRUCTION.

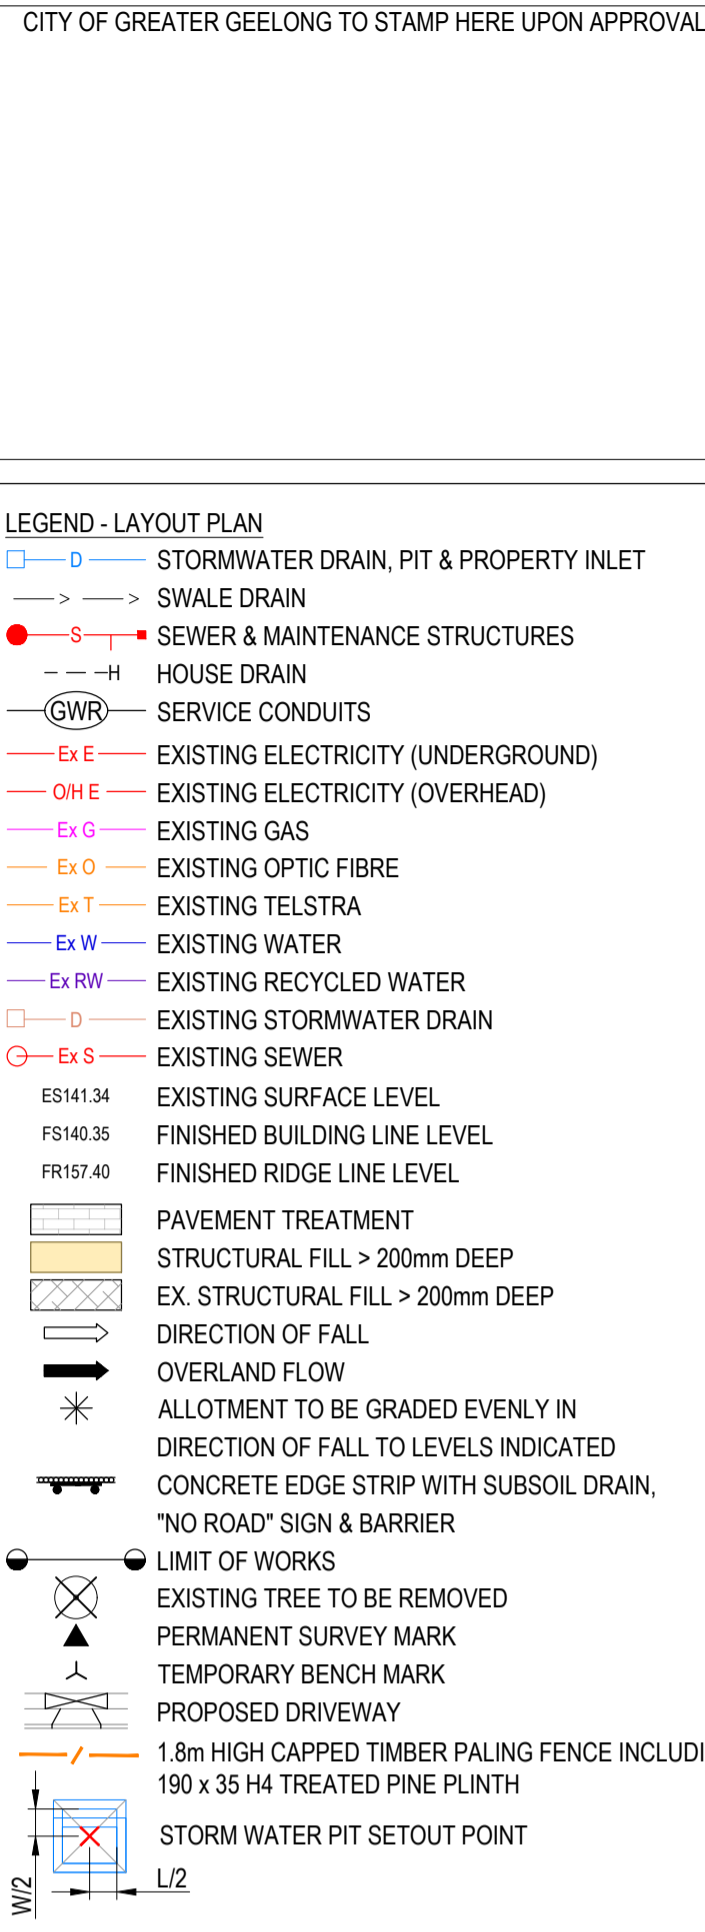

NOTE: STREET TREE LOCATIONS SHOWN ARE INDICATIVE ONLY. ULTIMATE LOCATION IS TO BE PROVIDED/CONFIRMED BY LANDSCAPE ARCHITECTS

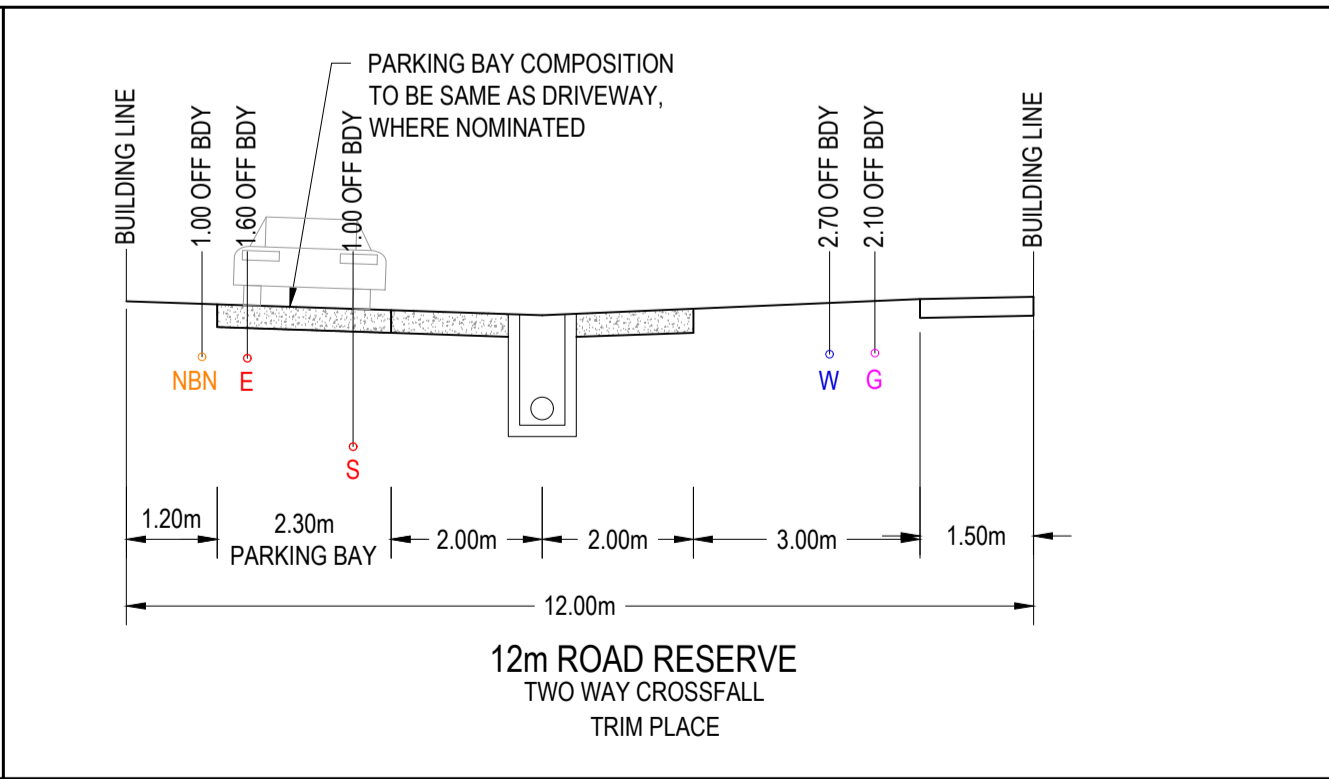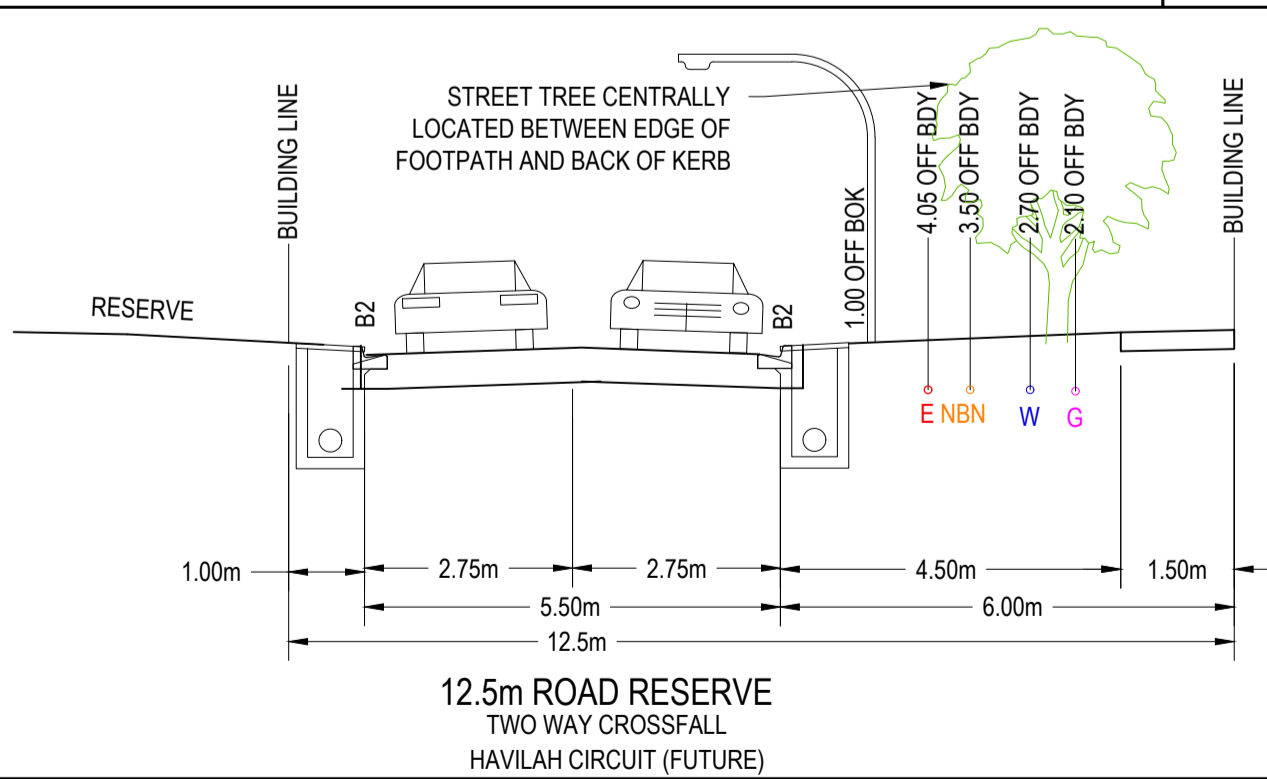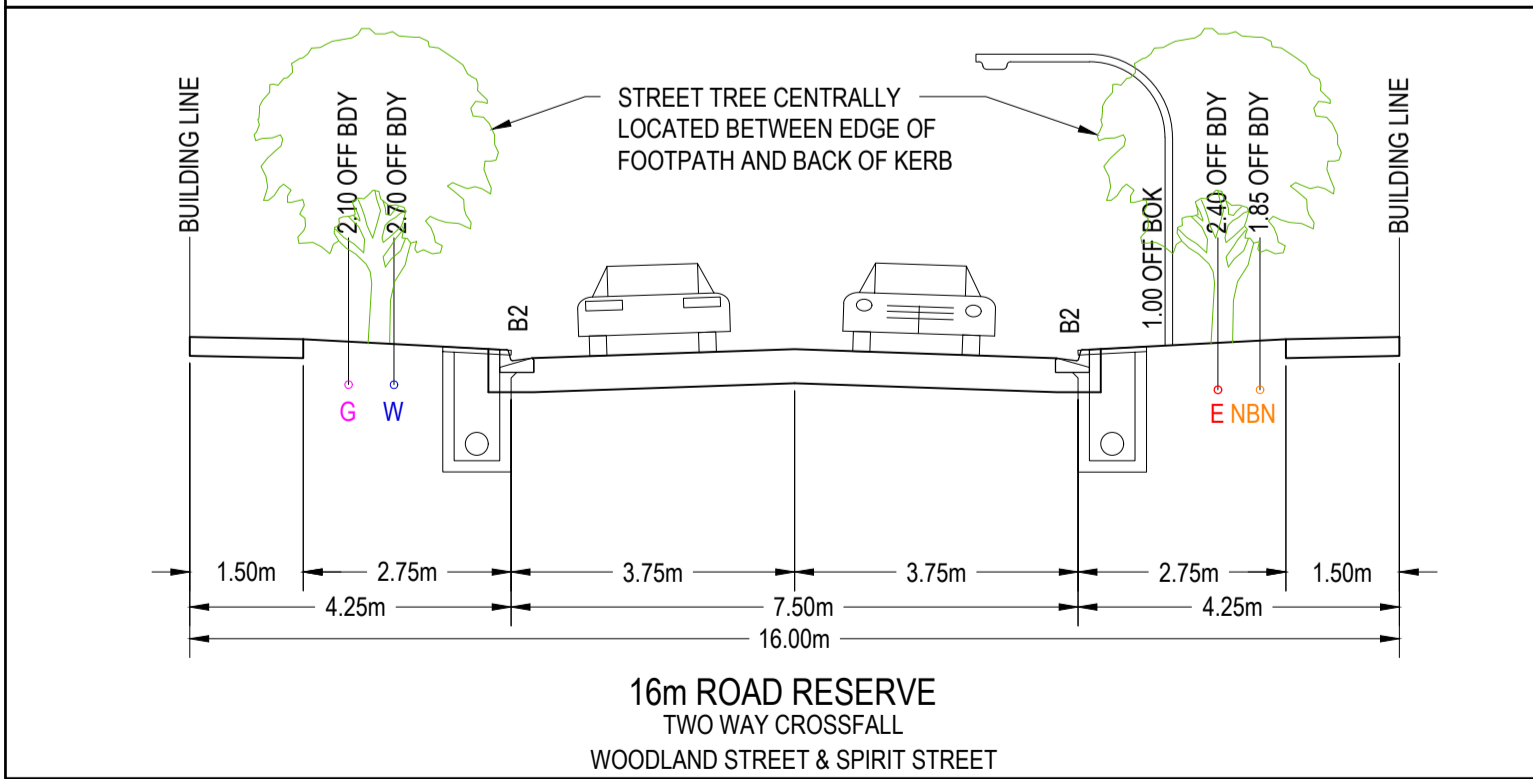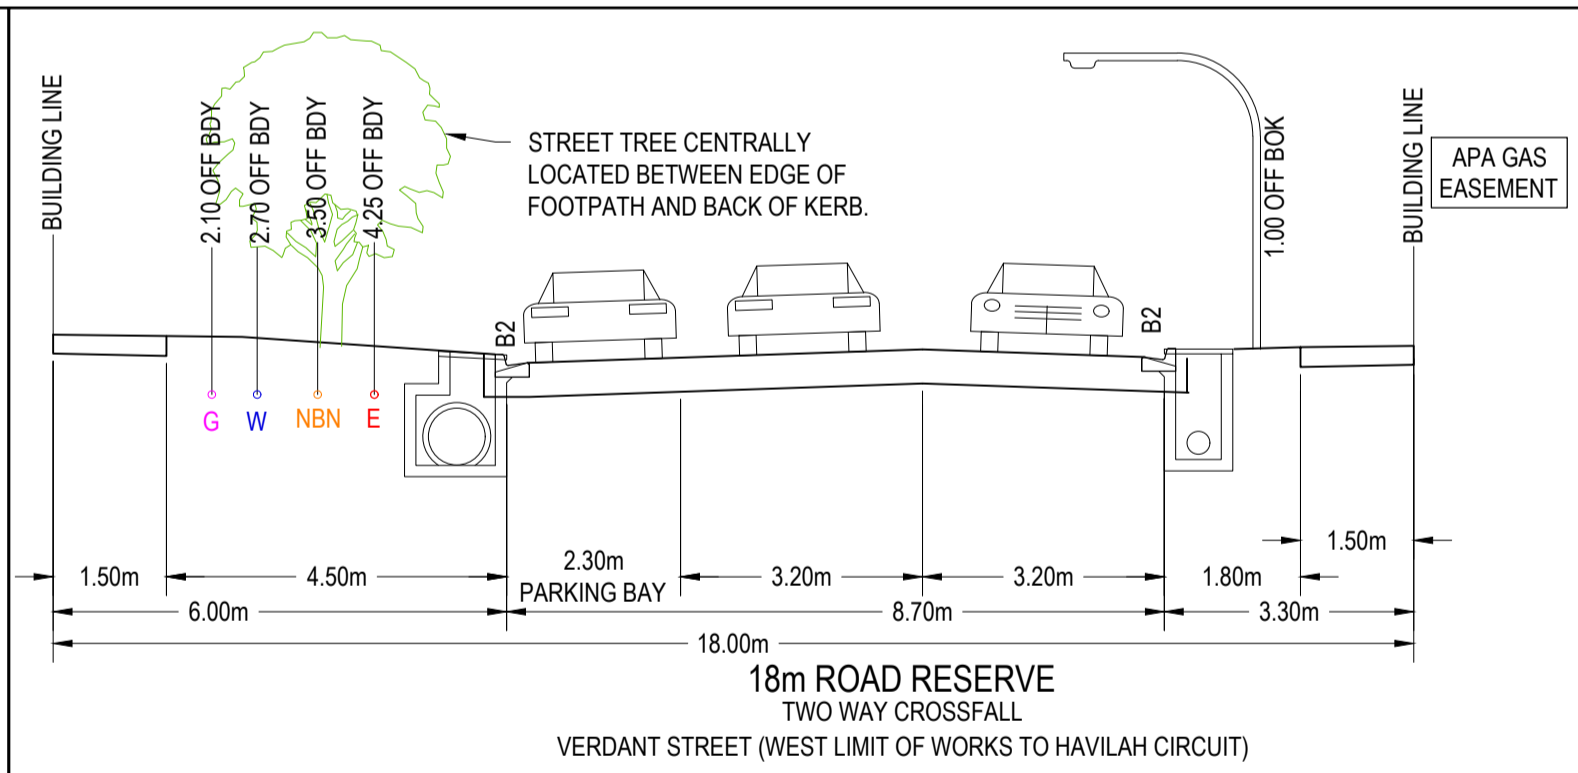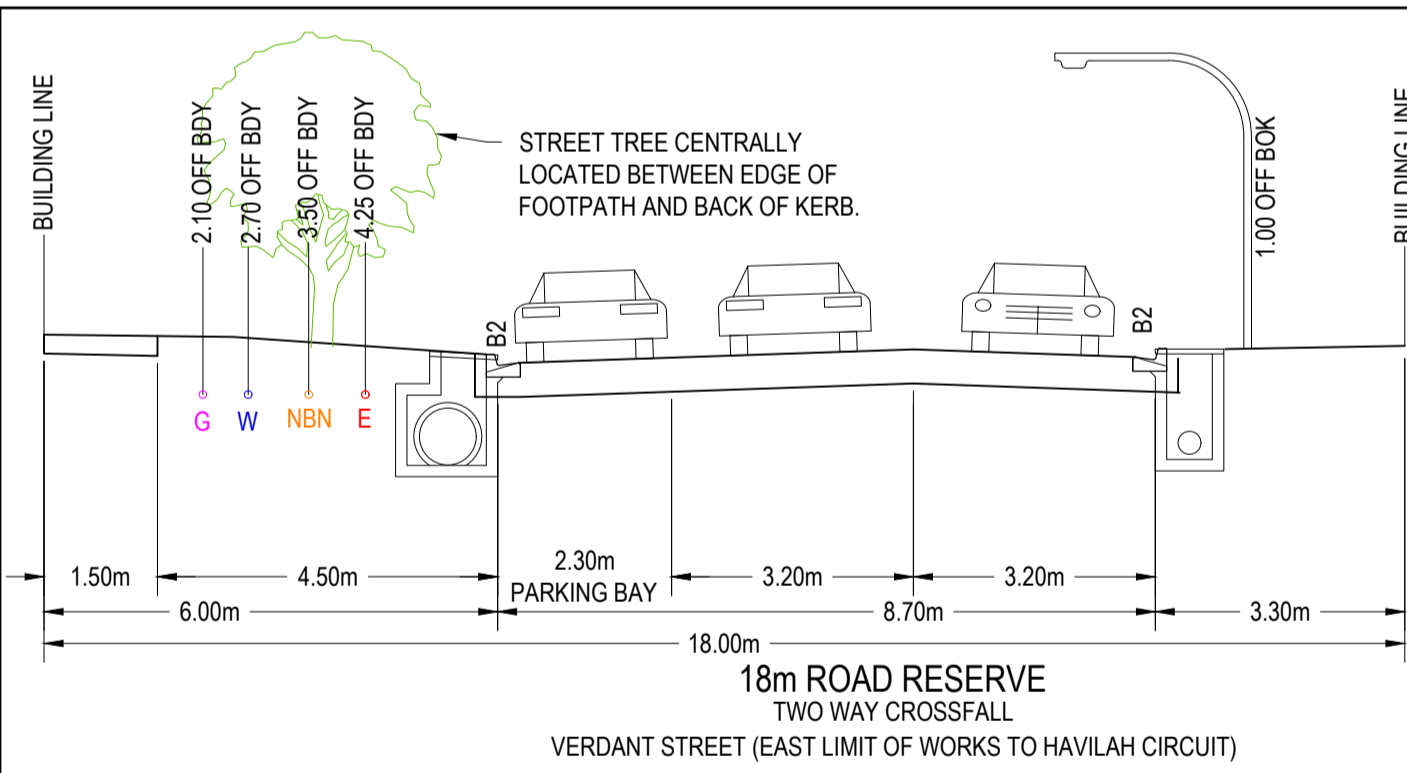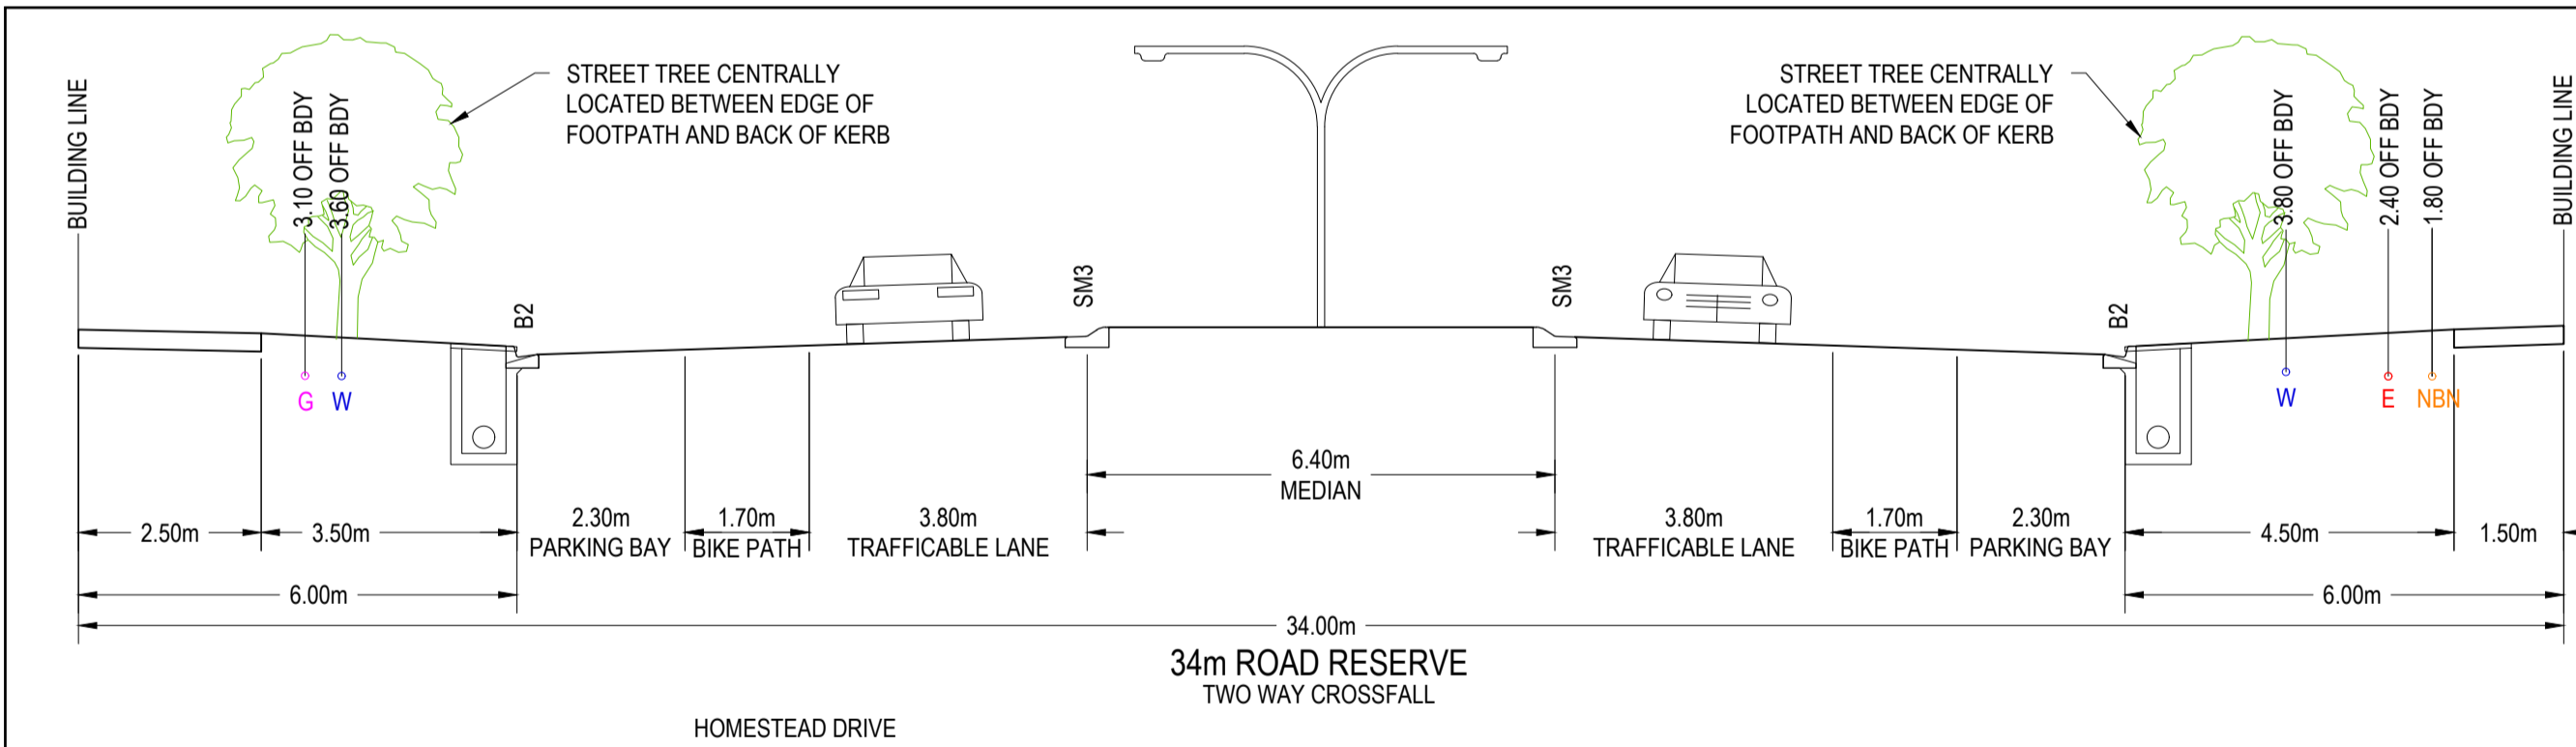

WARNING

EXISTING 5000 APA GAS TRANSMISSION PIPELINE IN VICINITY OF WORKS. CONTRACTOR TO REFER TO APA CONDITIONS. WRITTEN CONSENT APPROVED FROM APA FOR WORKS WITHIN THE GAS TRANSMISSION EASEMENT

WARNING

Beware of Underground & Overhead Services

The locations of underground & overhead services are approximate only & their exact position should be proven on site. No guarantee is given that all existing services are shown. Locate all underground services before commencement of works

DIAL 1100 BEFORE YOU DIG

www.1100.com.au

REVISION	DATE	ISSUE DESCRIPTION	DRAWN	DESIGNED	APPROVED
A	18/10/21	ISSUED FOR APPROVAL	C.ROHDE	C.ROHDE	M.TROUNCE

villawood
properties
Communities Designed for Living

creo
CONSULTANTS
Suite 1, 2 Bloomsbury Street
Geelong, VIC, Australia 3220

Coridale
LARA

CORIDALE ESTATE - STAGE 17A
LAYOUT PLAN - 2

ISSUED FOR APPROVAL
NOT FOR CONSTRUCTION

SCALE AT A1	DRAWN	DESIGNED
AS SHOWN	C.ROHDE	C.ROHDE
PROJECT ENGINEER	PROJECT MANAGER	DATE FIRST ISSUE
M.TROUNCE	M.TROUNCE	OCTOBER 2021
PROJECT No.	DRAWING No.	REVISION
180014.17A	R201	A