
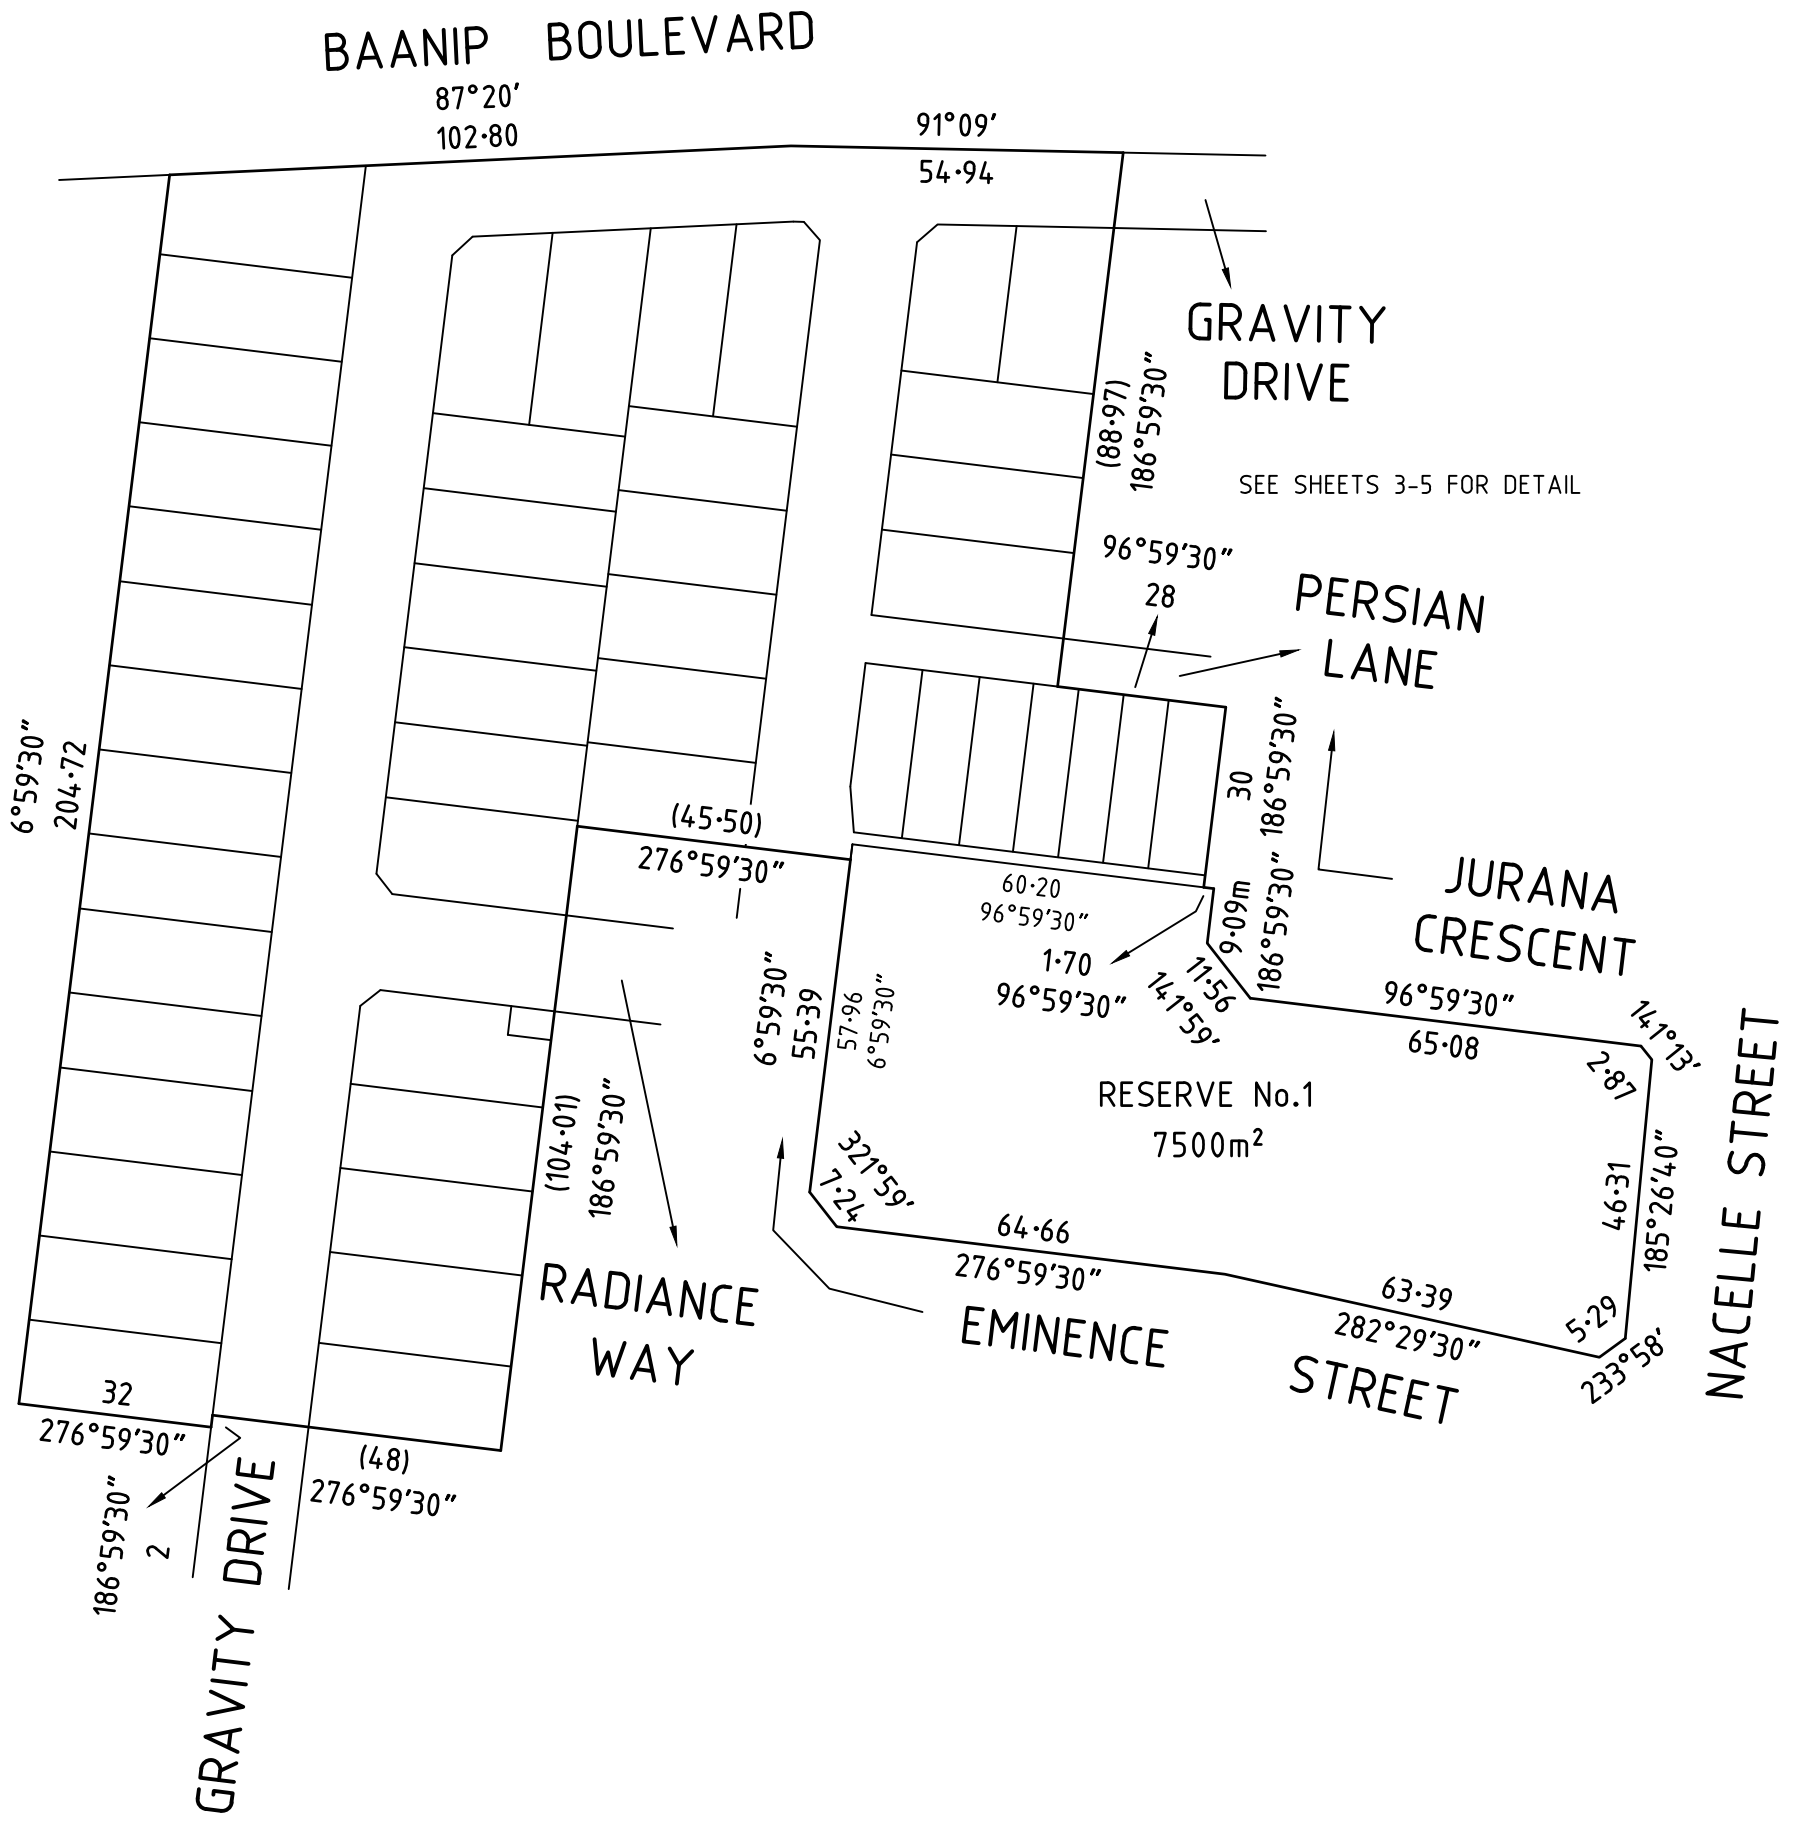

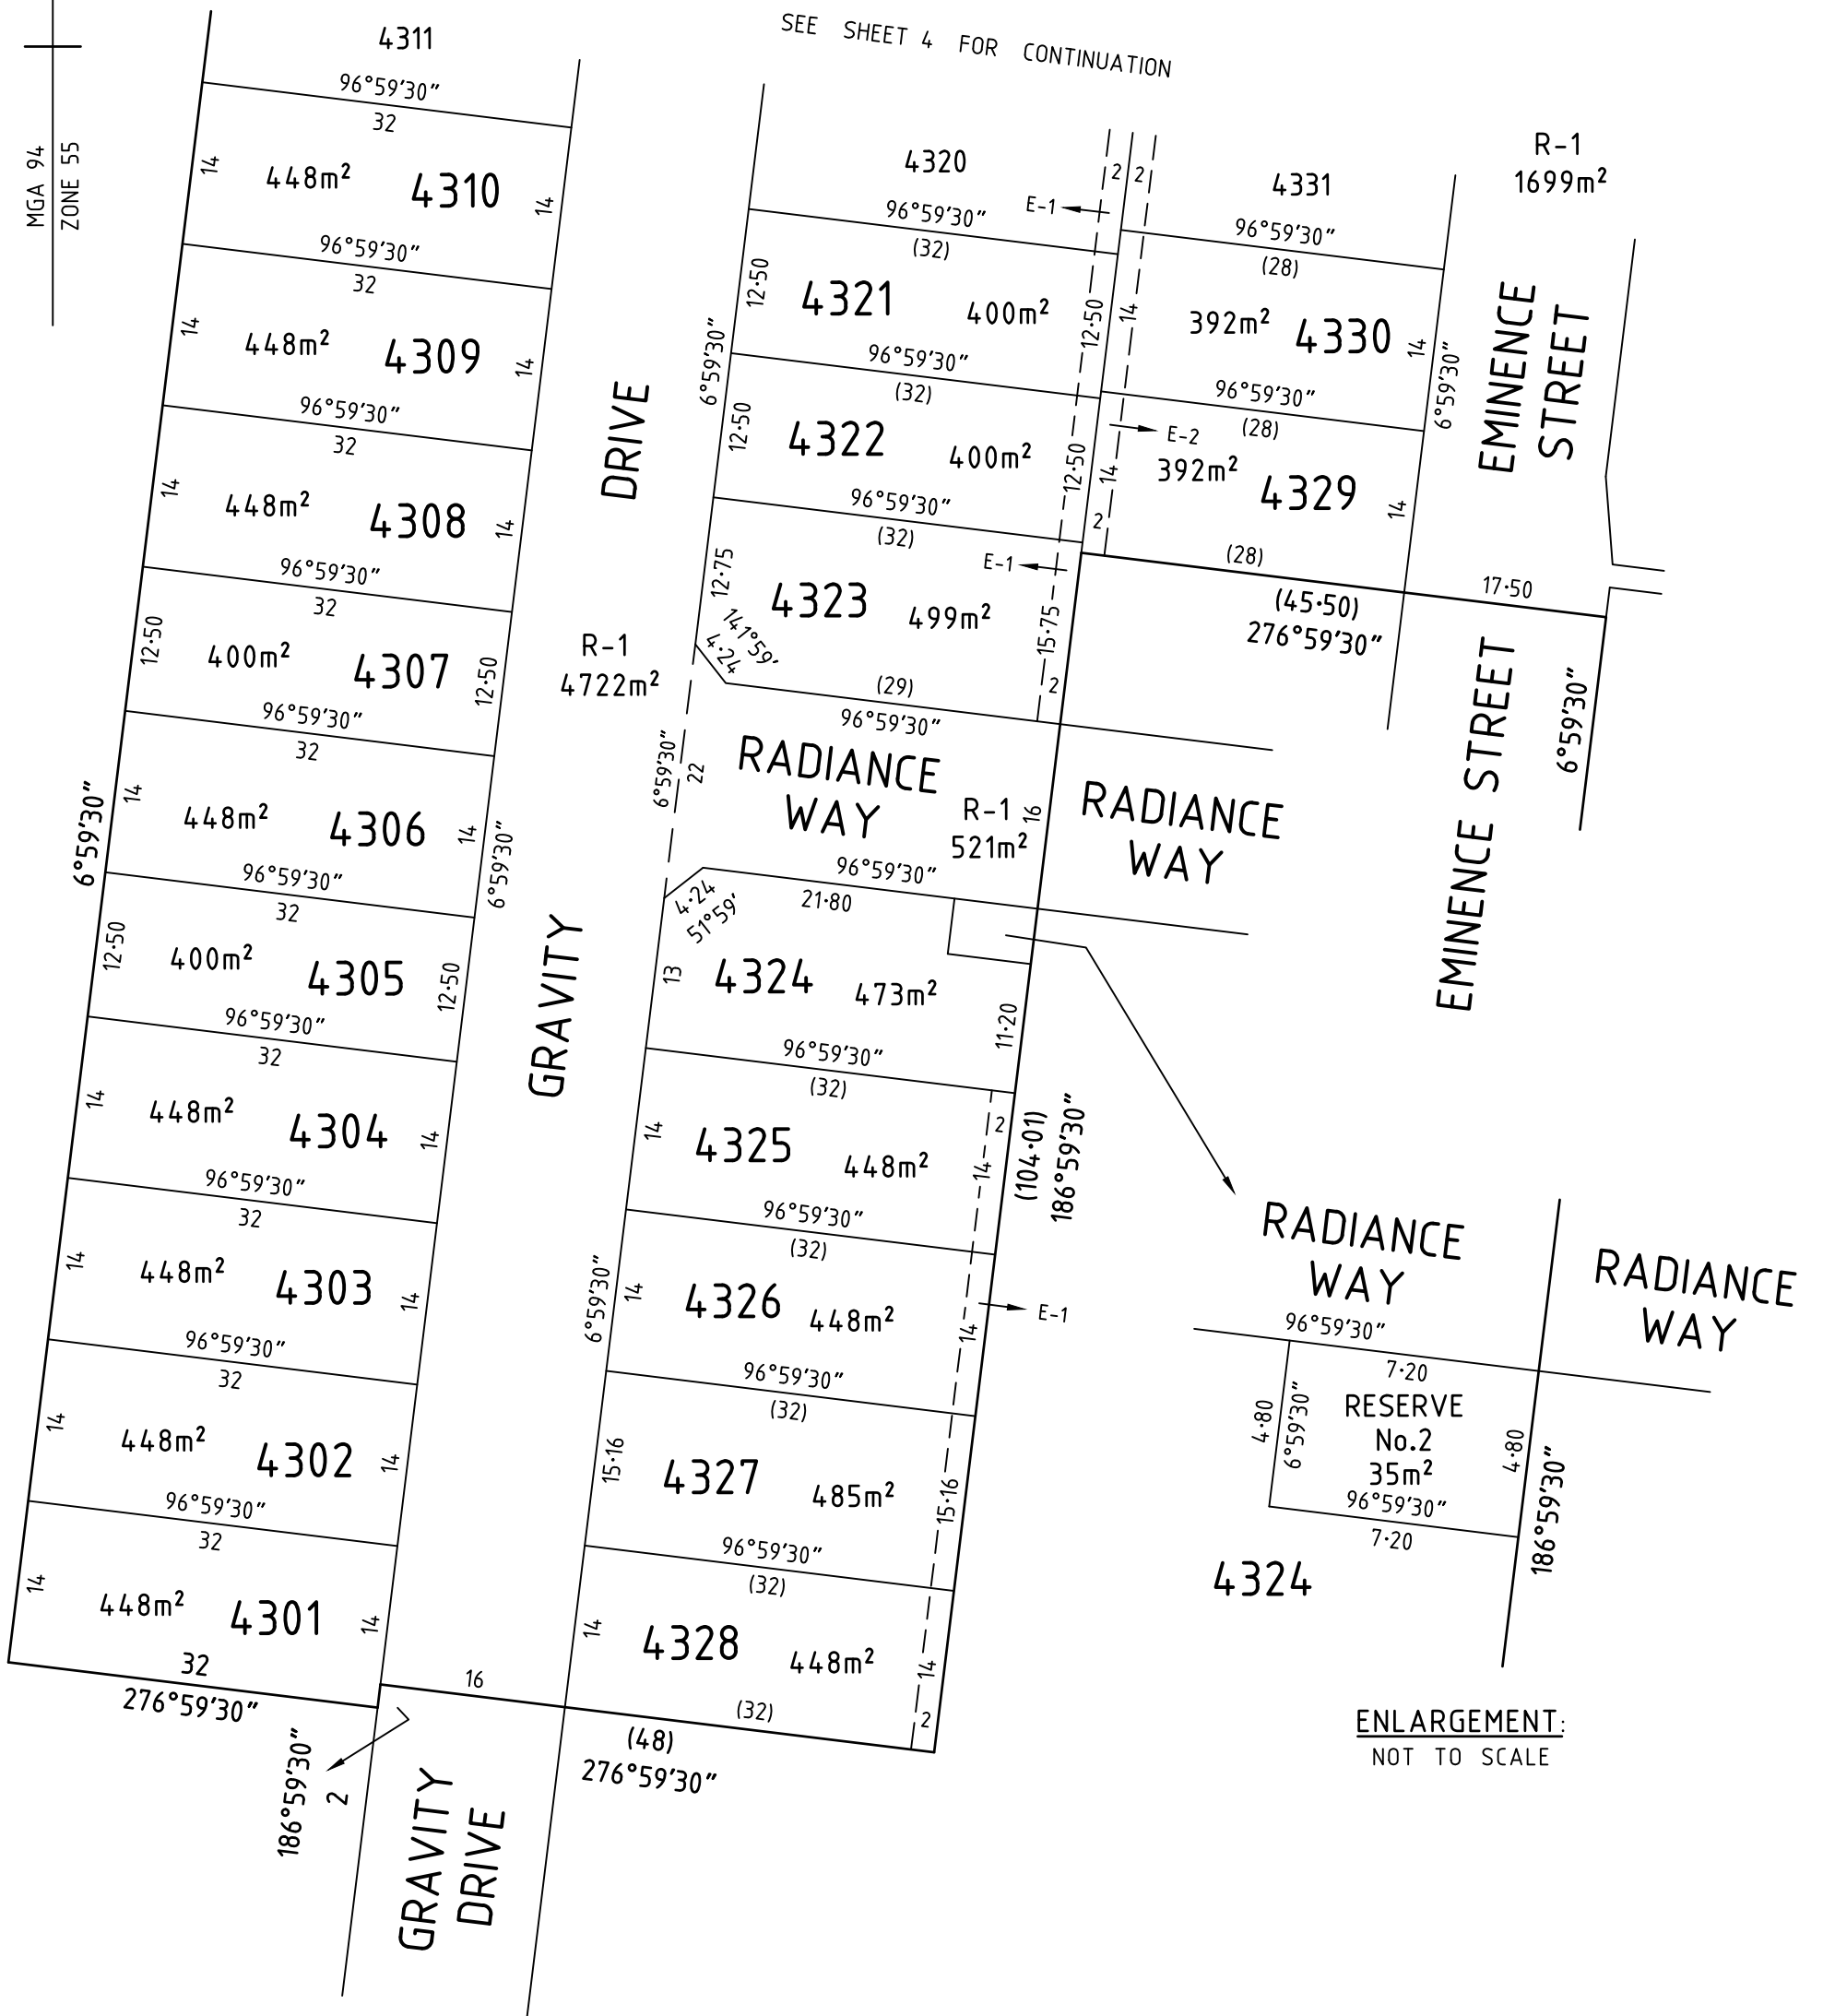
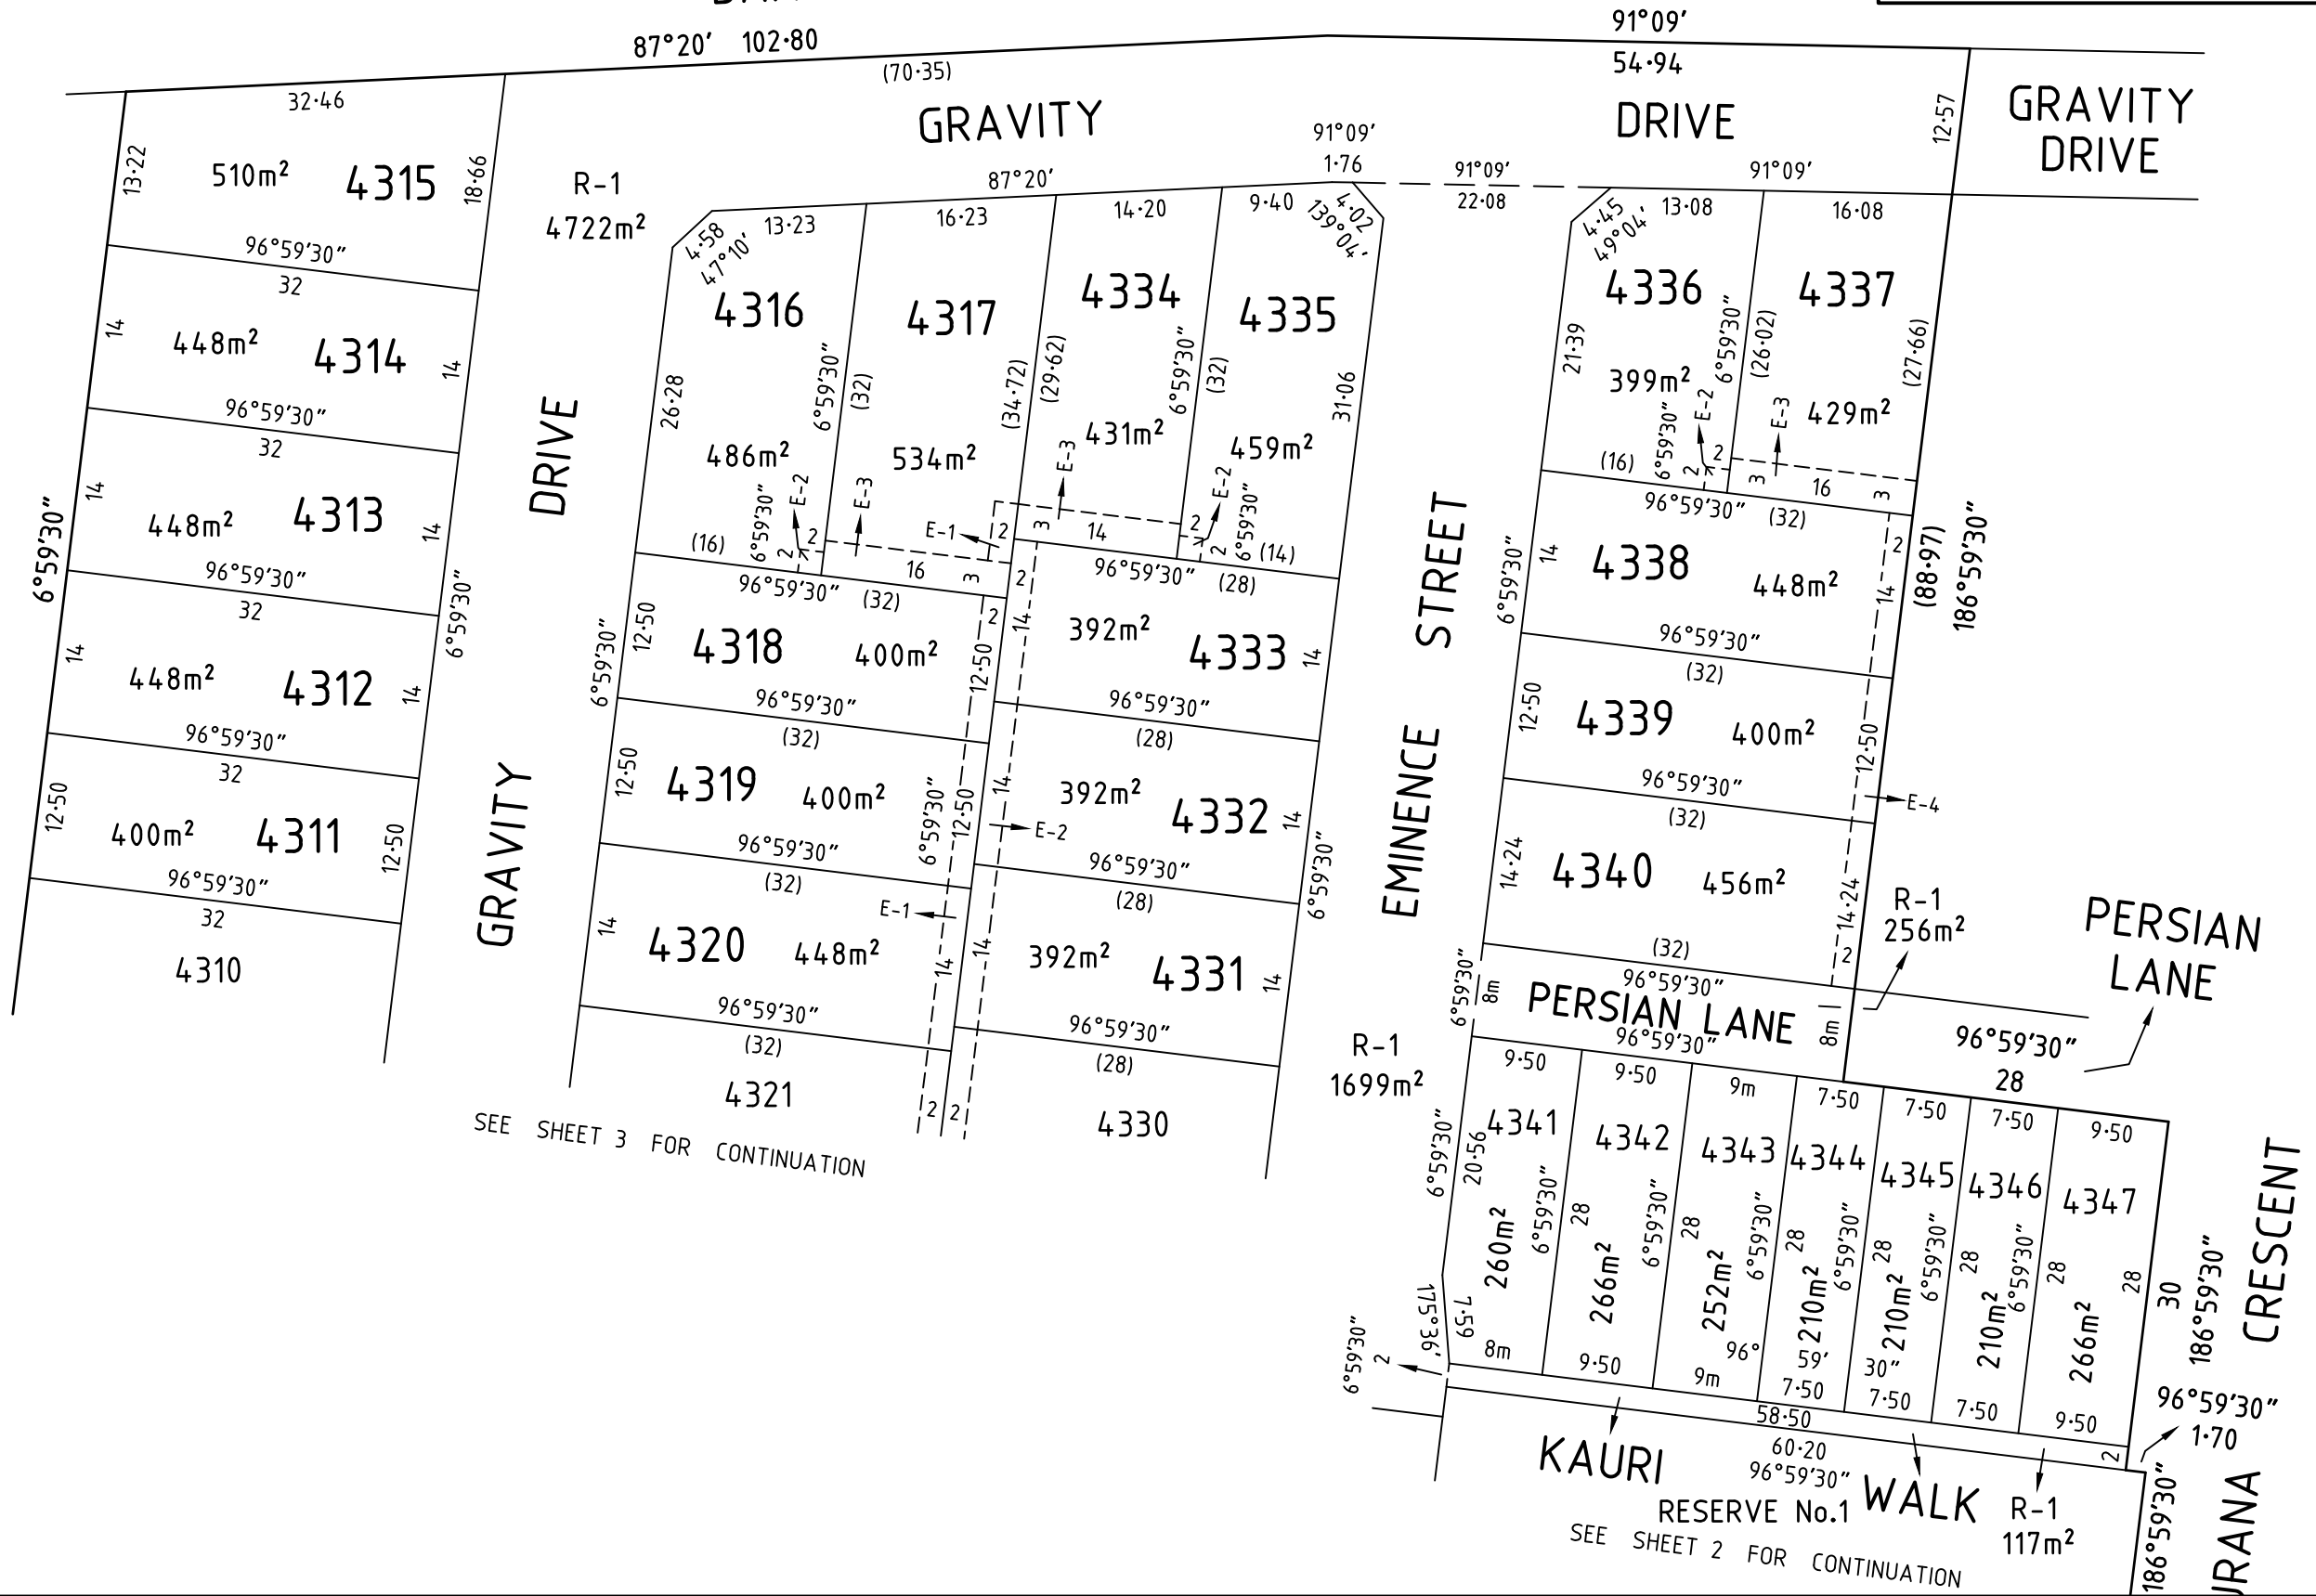



PLAN OF SUBDIVISION			EDITION 1	PS 822698U		
LOCATION OF LAND PARISH: DUNEED TOWNSHIP: - SECTION: - CROWN ALLOTMENT: - CROWN PORTION: 14 (PART) TITLE REFERENCE: VOL. FOL. LAST PLAN REFERENCE: PS 822699S (LOT A) POSTAL ADDRESS: 165-191 BOUNDARY ROAD (AT TIME OF SUBDIVISION) MOUNT DUNEED 3217 MGA94 CO-ORDINATES: E 265 500 ZONE 55 (AT APPROX CENTRE OF LAND IN PLAN) N 5 766 840 GDA 94			Council Name: City of Greater Geelong Council Reference Number: 13851 Planning Permit Reference: 496/2012 SPEAR Reference Number: S124420J Certification This plan is certified under section 6 of the Subdivision Act 1988 Public Open Space A requirement for public open space under section 18 of the Subdivision Act 1988 has not been made Digitally signed by: Melissa Anne Garrett for City of Greater Geelong on 17/05/2019			
VESTING OF ROADS AND OR RESERVES			NOTATIONS			
IDENTIFIER	COUNCIL/BODY/PERSON		CREATION OF RESTRICTIONS No.43 & 43A: RESTRICTIONS ARE TO BE CREATED UPON REGISTRATION OF THIS PLAN -SEE SHEETS 5 & 6. LOTS 1-4300 HAVE BEEN OMITTED FROM THIS PLAN. OTHER PURPOSE OF PLAN: PART OF THE EASEMENT FOR DRAINAGE CREATED ON PS816035G CONTAINED WITHIN ROADS R-1 ON THIS PLAN IS TO BE REMOVED UPON REGISTRATION OF THIS PLAN. GROUNDS FOR REMOVAL: CONSENT OF THE RELEVANT AUTHORITY VIDE SEC.6(1)(k)(iii) SUBDIVISION ACT 1988.			
ROADS R-1 RESERVE No.1 RESERVE No.2	CITY OF GREATER GEELONG CITY OF GREATER GEELONG POWERCOR AUSTRALIA LIMITED					
NOTATIONS						
DEPTH LIMITATION: DOES NOT APPLY						
STAGING: THIS IS NOT A STAGED SUBDIVISION. PLANNING PERMIT No.						
SURVEY: THIS PLAN IS BASED ON SURVEY IN PS807893H THIS SURVEY HAS BEEN CONNECTED TO PERMANENT MARK No(s) N/A IN PROCLAIMED SURVEY AREA No. N/A						
EASEMENT INFORMATION						
LEGEND: A - APPURTENANT EASEMENT E - ENCUMBERING EASEMENT R - ENCUMBERING EASEMENT (ROAD)						
EASEMENT REFERENCE	PURPOSE	WIDTH (METRES)	ORIGIN	LAND BENEFITED/IN FAVOUR OF		
E-1 & E-3 E-2 & E-3 E-4	DRAINAGE PIPELINES OR ANCILLARY PURPOSES DRAINAGE	SEE PLAN SEE PLAN SEE PLAN	THIS PLAN THIS PLAN - SECTION 136 WATER ACT 1989 PS 816035G	CITY OF GREATER GEELONG BARWON REGION WATER CORPORATION CITY OF GREATER GEELONG		
 LICENSED LAND SURVEYORS & ENGINEERS CALIBRE CONSULTING (MELB) PTY LTD Level 2, 55 Southbank Boulevard Southbank VIC 3006 T 03 9203 9000 F 03 9203 9099 www.calibregroup.com		Armstrong MtDuneed Stage 43	DEVELOPMENT AREA: 3.401ha	NO.OF LOTS: 47	ORIGINAL SHEET SIZE: A3	SHEET 1 OF 6 SHEETS
REF: M100611/43 [18-001288] VERSION: D GL 22/10/18		Digitally signed by: Zois Aravanis, Licensed Surveyor, Surveyor's Plan Version (D), 13/03/2019, SPEAR Ref: S124420J				





BAANIP BOULEVARD




SEE SHEET 3 FOR CONTINUATION

SEE SHEET 2 FOR CONTINUATION



LICENSED LAND SURVEYORS & ENGINEERS
 CALIBRE CONSULTING (MELB) PTY LTD
 Level 2, 55 Southbank Boulevard
 Southbank VIC 3006
 T 03 9203 9000
 F 03 9203 9099
 www.calibregroup.com

SCALE
 1:600



ORIGINAL SHEET
 SIZE: A3

SHEET 4

Digitally signed by: Zois Aravanis, Licensed Surveyor,
 Surveyor's Plan Version (D),
 13/03/2019, SPEAR Ref: S124420J

Digitally signed by:
 City of Greater Geelong,
 17/05/2019,
 SPEAR Ref: S124420J

CREATION OF RESTRICTION No.43

UPON REGISTRATION OF THIS PLAN THE FOLLOWING RESTRICTION IS CREATED

LAND TO BE BURDENED: LOTS 4301- 4340 (BOTH INCLUSIVE)

LAND TO BENEFIT: LOTS 4301- 4340 (BOTH INCLUSIVE)

DESCRIPTION OF RESTRICTION


THE REGISTERED PROPRIETOR OR PROPRIETORS FOR THE TIME BEING OF A LOT ON THIS PLAN OF SUBDIVISION HIS HEIRS EXECUTORS ADMINISTRATORS AND TRANSFEREES SHALL NOT AT ANY TIME ON THE SAID LOT OR ANY PART OR PARTS THEREOF:

- (i) BUILD OR CAUSE TO BE BUILT OR ALLOW TO BE BUILT OR ALLOW TO REMAIN MORE THAN ONE PRIVATE DWELLING-HOUSE (WHICH EXPRESSION SHALL INCLUDE A HOUSE, APARTMENT, UNIT OR FLAT);
- (ii) BUILD OR CAUSE TO BE BUILT OR ALLOW TO BE BUILT OR ALLOW TO REMAIN A DWELLING-HOUSE OR ANY OTHER IMPROVEMENTS, OR CARRY OUT CAUSE TO BE CARRIED OUT OR ALLOW TO BE CARRIED OUT ANY BUILDING OR CONSTRUCTION WORKS ON THE LOT UNLESS:
 - (A) COPIES OF BUILDING PLANS, ELEVATIONS, ROOF PLAN, SITE PLAN (INCORPORATING SET-BACK FROM ALL BOUNDARIES, BUILDING ENVELOPE, EXISTING CONTOUR, PROPOSED FINISHED FLOOR LEVELS AND SITE LEVELS, ALL PROPOSED DRIVEWAYS AND PATHS, DETAILS OF FENCES AND OUTBUILDINGS AND LANDSCAPING) AND SCHEDULE OF EXTERNAL COLOURS AND MATERIALS ("PLANS") HAVE BEEN SUBMITTED TO THE DESIGN ASSESSMENT PANEL CARE OF STEPHAN P. KOSA & ASSOCIATES P/L, PO BOX 356, MONT ALBERT, VIC 3127 OR SUCH OTHER ENTITY AS MAY BE NOMINATED BY THE DESIGN ASSESSMENT PANEL FROM TIME TO TIME;
 - (B) THE PLANS COMPLY WITH THE APPROVED DESIGN GUIDELINES AND BUILDING ENVELOPES ISSUED IN ACCORDANCE WITH PLANNING PERMIT 496-2012 OR ANY SUBSEQUENT PERMIT, A COPY OF WHICH CAN BE OBTAINED FROM THE WEBSITE AT www.armstrongmtduneeed.com.au; AND
 - (C) THE DESIGN ASSESSMENT PANEL OR SUCH OTHER ENTITY AS MAY BE NOMINATED BY THE DESIGN ASSESSMENT PANEL FROM TIME TO TIME HAS GIVEN ITS WRITTEN APPROVAL TO THE PLANS PRIOR TO THE COMMENCEMENT OF WORKS;
- (iii) BUILD OR CAUSE TO BE BUILT OR ALLOW TO BE BUILT OR ALLOW TO REMAIN STANDING A DWELLING-HOUSE WITH A FLOOR AREA OF LESS THAN:
 - (A) 160 SQUARE METRES IN THE CASE OF A LOT HAVING AN AREA OF 500 SQUARE METRES OR GREATER; OR
 - (B) 130 SQUARE METRES IN THE CASE OF A LOT HAVING AN AREA OF 400 SQUARE METRES OR GREATER BUT LESS THAN 500 SQUARE METRES; OR
 - (C) 100 SQUARE METRES IN THE CASE OF A LOT HAVING AN AREA OF 300 SQUARE METRES OR GREATER BUT LESS THAN 400 SQUARE METRES; OR
 - (D) 75 SQUARE METRES IN THE CASE OF A LOT HAVING AN AREA OF LESS THAN 300 SQUARE METRES.

FOR THE PURPOSES OF CALCULATING THE FLOOR AREA OF A DWELLING HOUSE THE AREA OF THE GARAGES, TERRACES, PERGOLAS OR VERANDAHS SHALL BE EXCLUDED.

- (iv) BUILD OR CAUSE TO BE BUILT OR ALLOW TO BE BUILT OR ALLOW TO REMAIN ANY FENCING:
 - (A) ALONG A FRONT STREET BOUNDARY; OR
 - (B) BETWEEN THE FRONT STREET BOUNDARY AND THE BUILDING LINE; OR
 - (C) UPON A SIDE OR REAR BOUNDARY OF A LOT EXCEPT A FENCE:
 - a. WHICH IS CONSTRUCTED OF TIMBER PALINGS WITH EXPOSED POSTS CAPPED ACROSS THE TOP OF THE PALINGS; AND
 - b. WHICH DOES NOT EXCEED 1.8 METRES IN HEIGHT EXCLUDING A SCREEN ERECTED TO MEET THE REQUIREMENTS OF PART 4 OF THE *BUILDING REGULATIONS* 2006 IN RELATION TO OVERLOOKING.
- (v) SUBDIVIDE OR CAUSE TO SUBDIVIDE OR ALLOW TO BE SUBDIVIDED THE BURDENED LAND.
- (vi) ALLOW ANY OF THE ABOVE RESTRICTIONS TO BE CHANGED OR AMENDED UNLESS OTHERWISE APPROVED IN WRITING BY THE RESPONSIBLE AUTHORITY AND THE DESIGN ASSESSMENT PANEL.

THIS RESTRICTION SHALL CEASE TO HAVE EFFECT 10 YEARS AFTER THE DATE OF REGISTRATION OF THIS PLAN.

 <p>LICENSED LAND SURVEYORS & ENGINEERS CALIBRE CONSULTING (MELB) PTY LTD Level 2, 55 Southbank Boulevard Southbank VIC 3006 T 03 9203 9000 F 03 9203 9099 www.calibregroup.com</p>		ORIGINAL SHEET SIZE: A3	SHEET 5
	Digitally signed by: Zois Aravanis, Licensed Surveyor, Surveyor's Plan Version (D), 13/03/2019, SPEAR Ref: S124420J	Digitally signed by: City of Greater Geelong, 17/05/2019, SPEAR Ref: S124420J	
REF: M100611/43 [18-000215]	VERSION: D	GL 22/10/18	

CREATION OF RESTRICTION No.43A

UPON REGISTRATION OF THIS PLAN THE FOLLOWING RESTRICTION IS CREATED


LAND TO BE BURDENED: LOTS 4341 TO 4347 (BOTH INCLUSIVE)

LAND TO BENEFIT: LOTS 4341 TO 4347 (BOTH INCLUSIVE)

DESCRIPTION OF RESTRICTION

THE REGISTERED PROPRIETOR OR PROPRIETORS FOR THE TIME BEING OF A LOT ON THIS PLAN OF SUBDIVISION HIS HEIRS EXECUTORS ADMINISTRATORS AND TRANSFEREES SHALL NOT AT ANY TIME ON THE SAID LOT OR ANY PART OR PARTS THEREOF:

- (i) CONSTRUCT OR EXTEND ANY DWELLING OR ALLOW THE CONSTRUCTION OR EXTENSION OF ANY DWELLING UNLESS IT HAS BEEN ASSESSED FOR COMPLIANCE AGAINST THE SMALL LOT HOUSING CODE. FOR THE PURPOSES OF ASSESSMENT AGAINST THE SMALL LOT HOUSING CODE, ALL BURDENED LOTS ARE TO BE ASSESSED AS TYPE B LOTS.
- (ii) CONSTRUCT OR EXTEND ANY DWELLING OR ALLOW THE CONSTRUCTION OR EXTENSION OF ANY DWELLING UNLESS THE PLANS COMPLY WITH THE RELEVANT CLAUSES OF THE APPROVED DESIGN GUIDELINES, A COPY OF WHICH CAN BE OBTAINED FROM THE WEBSITE AT www.armstrongtduneeed.com.au

 <p>LICENSED LAND SURVEYORS & ENGINEERS CALIBRE CONSULTING (MELB) PTY LTD Level 2, 55 Southbank Boulevard Southbank VIC 3006 T 03 9203 9000 F 03 9203 9099 www.calibregroup.com</p>		ORIGINAL SHEET SIZE: A3	SHEET 6
	Digitally signed by: Zois Aravanis, Licensed Surveyor, Surveyor's Plan Version (D), 13/03/2019, SPEAR Ref: S124420J	Digitally signed by: City of Greater Geelong, 17/05/2019, SPEAR Ref: S124420J	
REF: M100611/43 [18-001288] VERSION: D GL 22/10/18			